

AD-A061 157

CONSTRUCTION ENGINEERING RESEARCH LAB (ARMY) CHAMPAI--ETC F/G 13/2
SYSTEMS APPROACH TO LIFE-CYCLE DESIGN OF PAVEMENTS. VOLUME I. L--ETC(U)
SEP 78 E S LINDOW
CERL-TR-M-253-VOL-1

UNCLASSIFIED

| OF |
AD
A061157

NL



AD A0 611 57

construction
engineering
research
laboratory



TECHNICAL REPORT M-253
September 1978

12
B.S.

SYSTEMS APPROACH TO LIFE-CYCLE DESIGN OF PAVEMENTS—
VOLUME I, LIFE2 USER'S MANUAL

LEVEL

by
E. S. Lindow

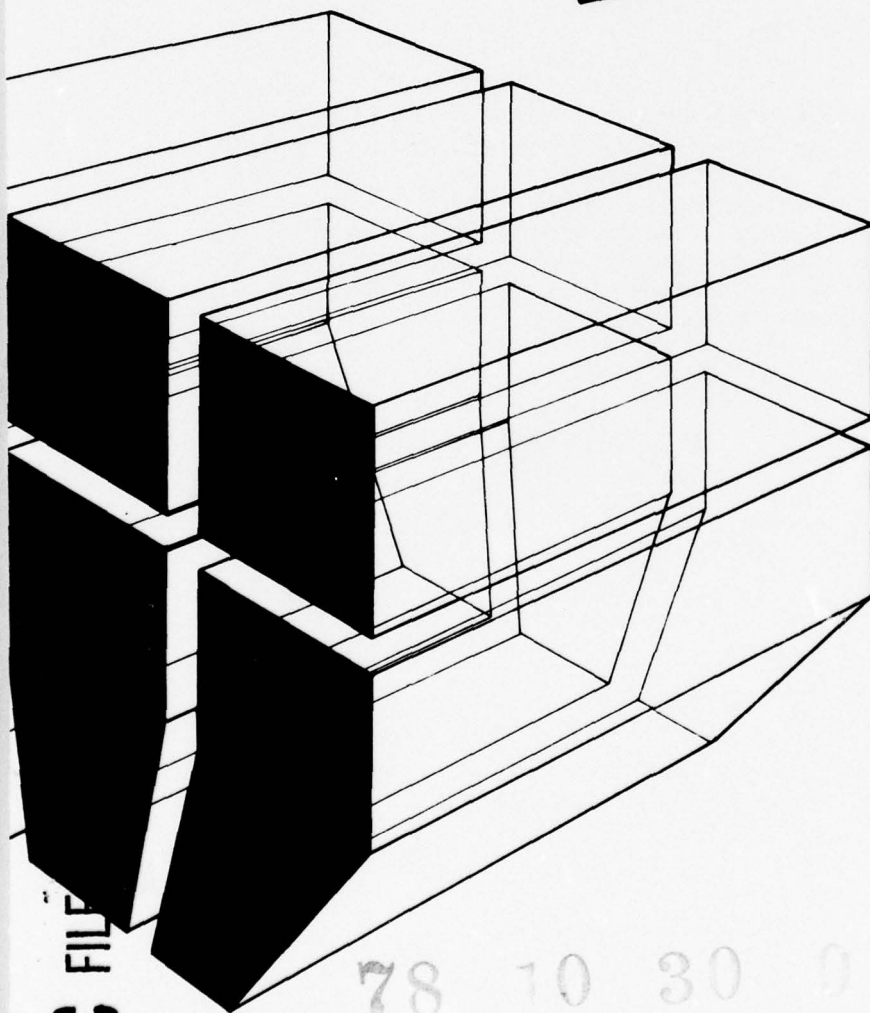

DDC FILE

78 10 30 914



Approved for public release; distribution unlimited.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The program described in this report is furnished by the government and is accepted and used by any recipient with the express understanding that the United States Government makes no warranty, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the information and data contained in this program or furnished in connection therewith, and the United States shall be under no liability whatsoever to any person by reason of any use made thereof. This program belongs to the government. Therefore, the recipient further agrees not to assert any proprietary rights therein or to represent this program to anyone as other than a government program.

***DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED
DO NOT RETURN IT TO THE ORIGINATOR***

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
14 CERL-TR-M-253 - VOL-1		
4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED	
6 SYSTEMS APPROACH TO LIFE-CYCLE DESIGN OF PAVEMENTS. VOLUME I. LIFE2 USER'S MANUAL,	9 FINAL rept.	
7. AUTHOR(s)	6. PERFORMING ORG. REPORT NUMBER	
10 E. S. Lindow		
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
USAECERL P.O. Box 4005 Champaign, IL 61820	16 4A763734DT08-01-001 12/71	
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE	
	11 September 1978	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	13. NUMBER OF PAGES	
12 93p.	89	
	15. SECURITY CLASS. (of this report)	
	Unclassified	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)		
Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
Copies are obtainable from National Technical Information Service Springfield, VA 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
LIFE2 life-cycle costs pavement design		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
<p>This report is the first of a three-volume report which documents an automated system (LIFE2), for analyzing pavement designs and maintenance and repair strategies based on life-cycle costs. LIFE2 models existing Corps of Engineers criteria for designing both rigid and flexible pavements for airfields, roads, and streets. The program also includes analytical procedures for evaluating earthwork, drainage, and frost protection requirements, as well as maintenance costs. The resulting combinations of design schemes and maintenance strategies are ranked by total cost over the design life of the pavement.</p>		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

405 279

UNCLASSIFIED LB
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Block 20 continued.

Volume I is the LIFE2 User's Manual, Volume II is the LIFE2 System Documentation, and Volume III is the LIFE2 Program Listing.

UNCLASSIFIED

FOREWORD

This work was conducted as part of the RDT&E Army Program 6.37.34A, Project 4A763734DT08, "Military Construction Systems Development," Task 01, "Military Airfield Facilities," Work Unit 001, "Systems Approach to Life-Cycle Design of Pavements." The Technical Monitor was Mr. E. Dudka, DAEN-MCE-D, Advanced Technology Branch, Engineering Division, Military Construction, Office of the Chief of Engineers.

The work was conducted by the Engineering and Materials Division (EM), U.S. Army Construction Engineering Research Laboratory (CERL). The CERL principal investigator was Mr. E. S. Lindow. The LIFE1 computer program was developed by Drs. P. F. McManus and E. L. Marvin. Mr. J. J. Brown was responsible for programming and operation of the LIFE2 program.

Dr. G. Williamson is Chief of EM. COL J. E. Hays is Commander and Director of CERL, and Dr. L. R. Shaffer is Technical Director.

ACCESSION for	
NTIS	Write Section <input checked="" type="checkbox"/>
DDC	B. ff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	SPECIAL
Dist.	
A	

78 10 30 014

CONTENTS

DD FORM 1473	1
FOREWORD	3
LIST OF FIGURES AND TABLES	5
1 INTRODUCTION	7
Background	
Objective	
Approach	
Mode of Technology Transfer	
2 PROGRAMMING APPROACH	8
Program Format	
LIFE2 Input	
Vehicle Characteristics	
3 OPERATING PROCEDURES	12
Defining the Problem	
Design Calculations	
Maintenance Calculations	
Life-Cycle Calculations	
Input Data Preparation	
Design Calculations	
Maintenance Calculations	
Life-Cycle Calculations	
Deck Setup	
Input-Output Files	
Example Problem	
4 SUMMARY AND CONCLUSIONS	18
Summary	
Conclusions	
APPENDIX A: Glossary of Terms	24
APPENDIX B: Program Variables	27
APPENDIX C: Vehicle Data Bank	55
APPENDIX D: LIFE2 Input Worksheet	67
APPENDIX E: LIFE2 Example Problem	71
REFERENCES	89
DISTRIBUTION	

FIGURES

Number	Page
1 Flowchart of LIFE2 Access Procedure	9
2 Framework of LIFE2 Methodology	10
3 Framework of LIFE2 Program Overlays	11
4 Design Calculation Procedure	13
5 Maintenance Calculation Procedure	15
6 Life-Cycle Calculation Procedure	16
7 Input for DESIGN Calculation	17
8 Input for MAINTENANCE Calculation	19
9 Input for LIFE-CYCLE Calculation	21
B1 Construction Material Cost Curve	49
B2 Vehicle Maintenance Cost Curve	50
B3 M&R Cost Curve	50
B4 M&R Periodic Costs	50
B5 Typical Data for Fixed Format FROST Card	51
B6 Typical Examples of 11 Types of Fixed Format Input Cards Used With EARTHWORK	52
B7 Typical Data for Fixed Format DRAINAGE Card	53
B8 Typical Underdrainage Cross Section	54
C1 Description of Gamma Delta Parameters	58
C2 Wheel Configuration Spacing Parameters	59
C3 Vehicle Data Bank Contents—September 1977	60
E1 Pavement Thickness vs. Service Life Array	78
E2 Life-Cycle Costs	79
E3 Suboptimized Solution for Overlay Strategy 5	80
E4 Suboptimized Solution for Overlay Strategy 6	81

FIGURES (cont'd)

Number	Page
E5 Rigid Construction Cost Analysis for Scheme 17 Associated With Overlay Strategy 5	82
E6 Flexible Construction Cost Analysis for Schemes Associated With Overlay Strategy 6	83
E7 Output for Design Scheme 17	86
E8 Earthwork Mass Diagram	87
E9 Drainage Analysis Summary	88

TABLES

Number	Page
1 LIFE2 Applicable Publications	8
B1 Variable Names	28

SYSTEMS APPROACH TO LIFE-CYCLE DESIGN OF PAVEMENTS— VOLUME I, LIFE2 USER'S MANUAL

1 INTRODUCTION

Background

Facility design and maintenance based on life-cycle cost analyses have been justified from economic and serviceability standards. The Armed Services Procurement Regulation acknowledges this by stating: "It is the policy of the Department of Defense to procure supplies and services from responsible sources at fair and reasonable prices calculated to result in the lowest ultimate overall cost to the Government."¹ To efficiently accommodate this guidance in pavement management activities, the Construction Engineering Research Laboratory (CERL) has developed a computerized system for performing life-cycle pavement analyses.

In the early 1970s, CERL began developing an automated system for designing airfield pavements based on life-cycle cost comparisons. The first iteration of this computer system, designated LIFE1, included procedures for performing rigid and flexible pavement and overlay designs for airfields, analyzing user costs and maintenance and repair costs on a macro scale, and combining design schemes and maintenance strategies into life-cycle cost rankings.^{2,3}

Subsequently, the system was expanded to include life-cycle design of pavements for roads, streets, and other surfaced areas. This second iteration, LIFE2,⁴ which this manual will replace, also included procedures for considering maintenance costs on the basis of individual M&R activities, thereby making the system more responsive and efficient in terms of data available to

the user. Frost protection design criteria were computerized and incorporated in LIFE2. In addition, since earthwork and subsurfaces drainage costs vary according to the selected pavement thickness design, automated procedures for considering these costs were included as optional analyses to the user.

LIFE2 was field tested in 1976 at the Corps of Engineers' Fort Worth District Office. Based on results of the field test and recent updating of the pavement design criteria employed, minor modifications were made in the system. LIFE2 is now an implementable tool which can aid pavement managers in optimizing expenditures by basing decisions on life-cycle costs rather than solely on the least first cost.

Objective

The objective of this research is to develop and validate computer-aided procedures for evaluating alternative pavement design schemes and maintenance and repair strategies based on life-cycle costs. The resultant system should aid the pavement manager in analyzing flexible and rigid pavements for airfields, as well as for roads and streets. The analyses should consider all costs integral to the construction and operation of pavement facilities during their design lives.

Approach

The computer program LIFE2 was developed to meet the above objective. The program is based on Corps of Engineers pavement design methods and criteria. In amalgamating the manual procedures into an automated system, certain deviations and additions were necessary. However, for pavement conditions and design lives, structural thickness designs for LIFE2 and the manual procedure will be identical.

This report provides the LIFE2 user with the necessary information to set up, operate, and interpret results of the program. Chapter 2 explains the hardware and software used in LIFE2. Chapter 3 provides the operating procedures for the program. Chapter 4 summarizes how LIFE2 can aid the user in the pavement design and management decision-making process. The appendices contain a glossary of terms, a definition of the program input variables, a discussion of the vehicle data bank used in conjunction with LIFE2, a worksheet to facilitate input preparation, and an example problem.

Mode of Technology Transfer

The LIFE2 system was developed principally as an engineering tool for use by Corps of Engineers District

¹ Armed Services Procurement Regulation 3-801 (Department of Defense, 1 July 1976).

² E. Marvin and P. McManus, *Life Cycle Analysis on an Airfield Pavement Facility*, Unpublished Report (Construction Engineering Research Laboratory [CERL], 1972).

³ J. Willmer, et al., *User Manual for LIFE1 Computer Program*, Technical Report S-28/AD774849 (CERL, January 1974).

⁴ E. Lindow, et al., *LIFE2 User's Manual*, Technical Report C-59/ADA023186 (CERL, January 1976).

Office personnel. The documents developed to effect technology transfer include:

- Volume I—LIFE2 User's Manual
- Volume II—LIFE2 System Documentation
- Volume III—LIFE2 Program Listing.

Access to the LIFE2 program for Corps of Engineers personnel will be through the Corps' Engineering Computer Program Library (ECPL).^{*} The procedure to be used is illustrated in Figure 1. For other users, the program and relevant documentation will be available from National Technical Information Service.

2 PROGRAMMING APPROACH

Traditionally, pavement design has been based on the least first cost (i.e., construction cost) which provides a serviceable structure for an anticipated life. The economics of maintenance and repairs (M&R) are not considered on this basis; however, when accrued over the pavement's anticipated life, these M&R costs can range from 25 to more than 100 percent of the initial construction cost of the facility, depending on the type of structure selected. Thus, to accurately compare design alternatives, the total cost of owning and operating the facility over its lifetime must be analyzed.

In pavement design, this type of analysis (termed life cycle design) becomes quite complex. The pavement is an intricate structural system having a wide range of interacting variables. These variables include properties of the component materials, section geometry, prevailing environment, traffic, construction quality, and M&R strategies. LIFE2 has been developed to account for these variables and their interactions when performing life-cycle economic analyses of pavement design alternatives.

The LIFE2 computer program models adopted Corps of Engineers pavement methods and criteria as published in the Department of the Army Technical Manual (TM) 5-800 series; Table 1 lists the applicable TMs on which the LIFE2 methodology is based. The program applies

^{*}ECPL is located at the U.S. Army Waterways Experiment Station, Vicksburg, Mississippi.

Table 1
LIFE2 Applicable Publications

TM No.*	Title
5-818-2	Pavement Design for Frost Condition
5-820-2	Subsurface Drainage Facilities for Airfields
5-820-3	Drainage and Erosion Control Structures for Airfields and Heliports
5-820-4	Drainage for Areas Other Than Airfields
5-822-1	Roads, Streets, and Pavements Generally: Traffic Study Requirements
5-822-2	General Provisions and Geometric Design for Roads, Streets, Walks, and Open Storage Areas
5-822-5	Flexible Pavements for Roads, Streets, Walks, and Open Storage Areas
5-822-6	Rigid Pavements for Roads, Streets, Walks, and Open Storage Areas
5-824-1	Airfields Other Than Army—General Provisions for Airfield Design
5-824-2	Airfield Flexible Pavements—Air Force
5-824-3	Rigid Pavement for Airfields Other Than Army

*Technical Manual number. These documents are prepared by the Department of the Army and govern pavement design at military installations. Many civilian agencies have also adopted these procedures.

to both rigid and flexible design analyses for airfields, roads and streets, and parking areas. Figure 2 illustrates the framework of the LIFE2 methodology.**


Program Format

LIFE2 is written in FORTRAN Extended for CDC-6000 series computers and is currently used on a CDC6600 computer in a remote batch mode. The program is available on magnetic tape or computer cards.

LIFE2 was developed using a program overlay[†] structure which reduces the amount of core memory storage required during execution. Figure 3 illustrates the modular framework of the LIFE2 program. The following paragraphs briefly describe the purpose of the zero overlay and each of the six primary program overlays.

**A detailed description of the design methods and criteria used is contained in: *Systems Approach to Life-Cycle Design of Pavements: Volume II—LIFE2 System Documentation*.

[†]See Glossary for definition.

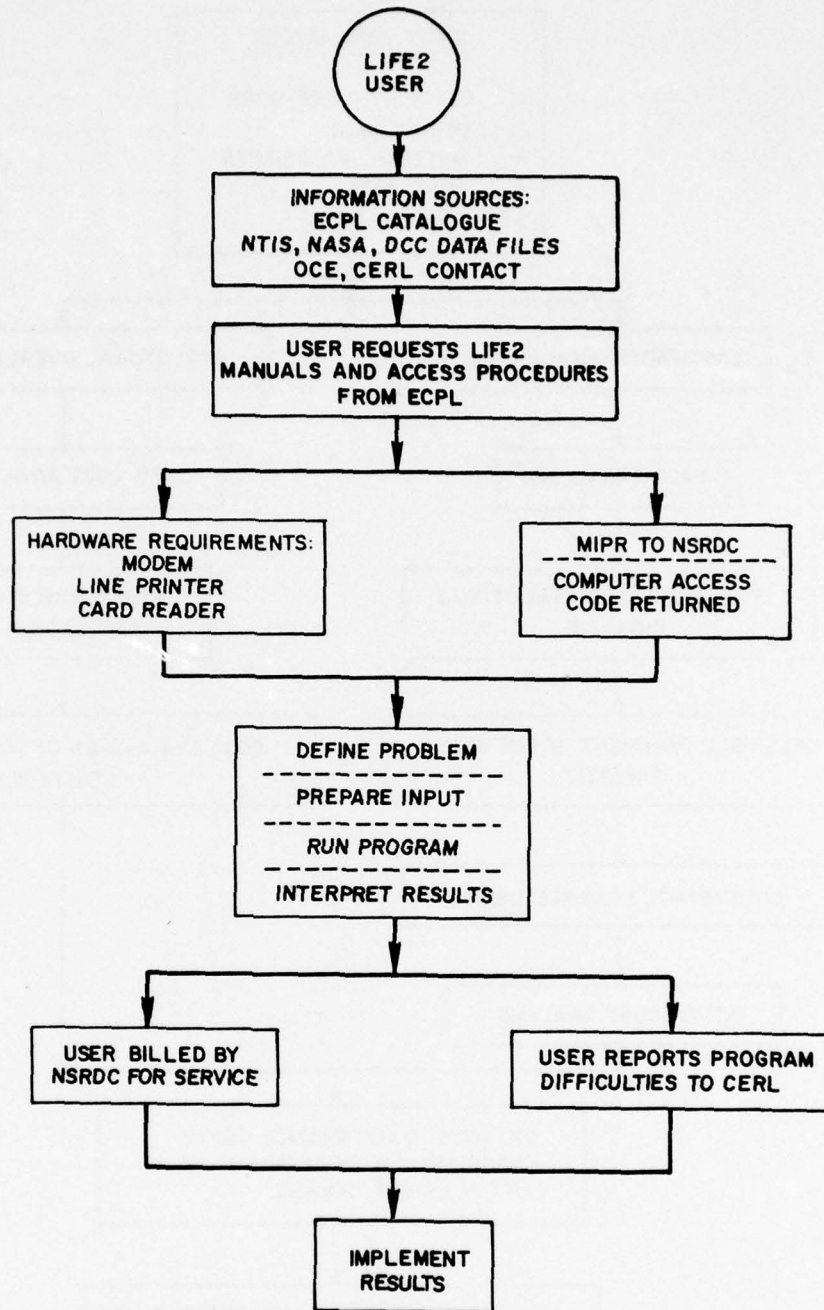

KEY:

ECPL - CORPS ENGINEERING COMPUTER PROGRAM LIBRARY
 MIPR - MILITARY INTERDEPARTMENTAL PURCHASE REQUEST
 NSRDC - NAVAL SHIP RESEARCH AND DEVELOPMENT CENTER, BETHESDA, MD.
 NTIS - NATIONAL TECHNICAL INFORMATION SERVICE

Figure 1. Flowchart of LIFE2 access procedure.

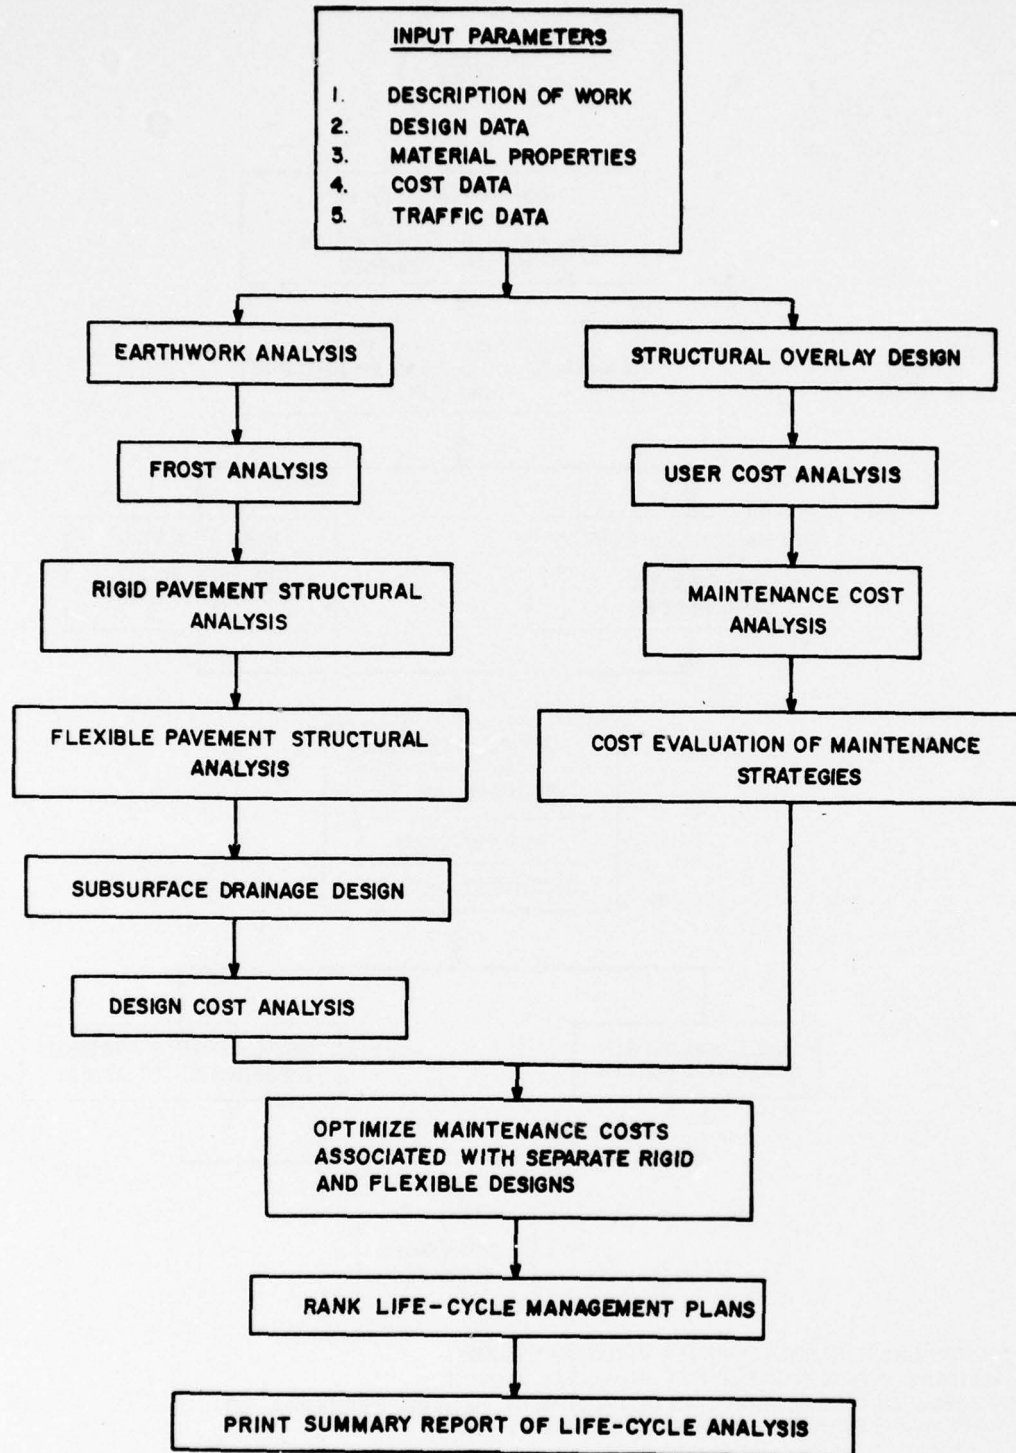


Figure 2. Framework of LIFE2 methodology.

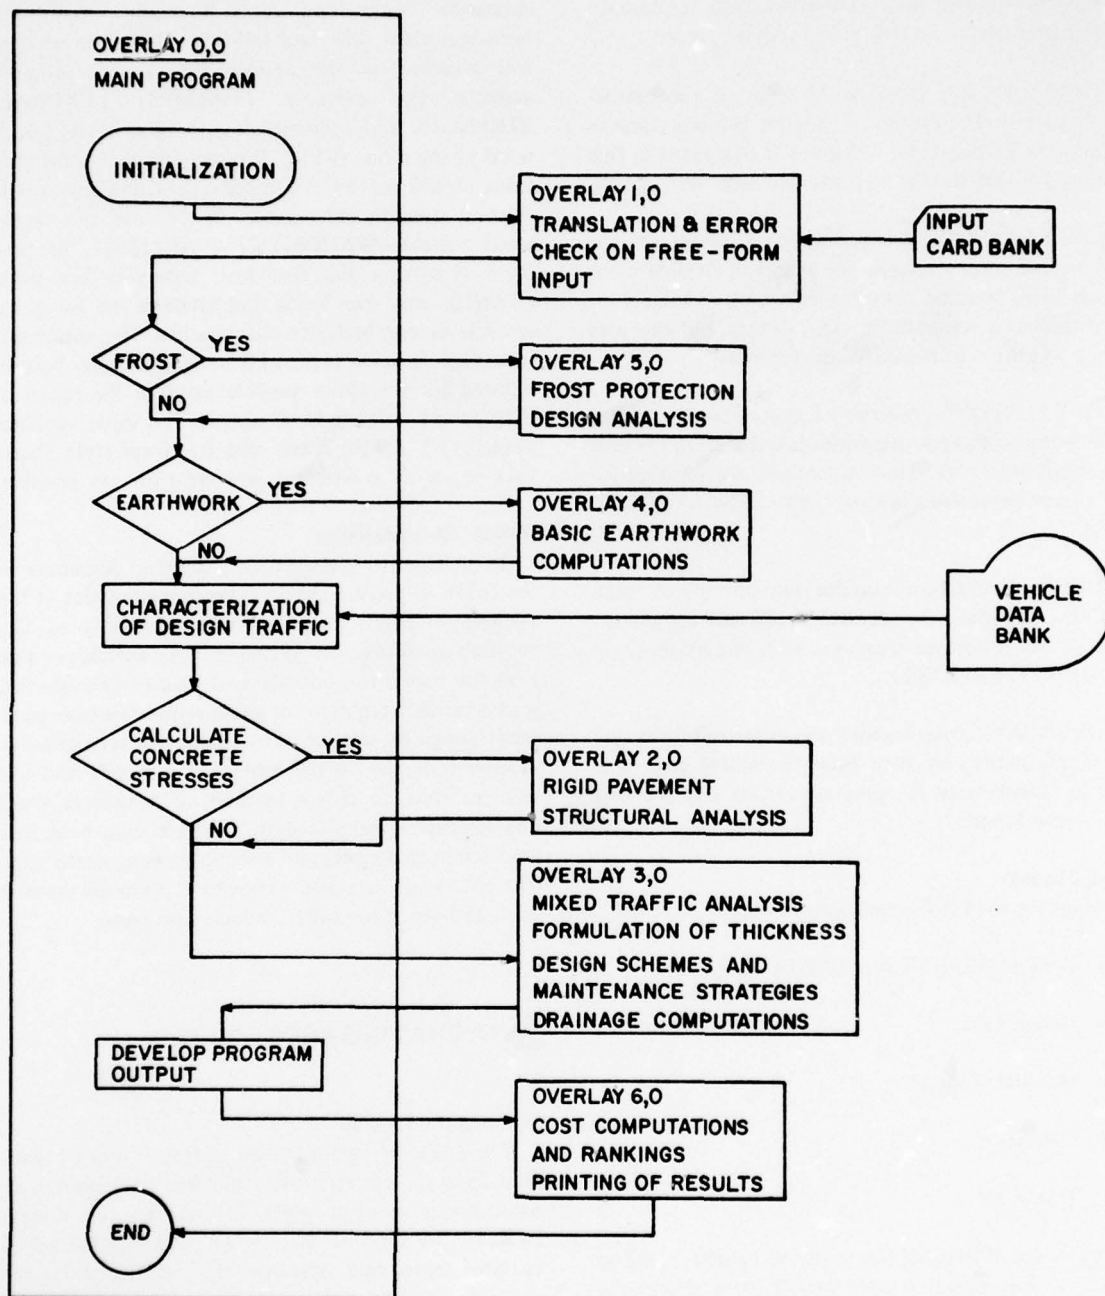


Figure 3. Framework of LIFE2 program overlays.

OVERLAY(0,0) is a control for calling the other program overlays. It remains in computer memory while the other overlays are loaded and unloaded.

OVERLAY(1,0) reads the input data from cards and checks for data errors. The error check is primarily to call attention to omissions and syntax errors.

OVERLAY(2,0) performs the rigid pavement structural analysis. The minimum concrete bending stress as a function of pavement thickness is computed in this overlay for slab resting on-grade and slab over asphalt.

OVERLAY(3,0) formulates thickness design schemes and maintenance strategies for rigid and flexible pavements. This module provides pavement thickness vs. base thickness tradeoff for rigid designs and executes suboptimization of maintenance strategies.

OVERLAY(4,0) performs earthwork computations, calculating earthwork quantities in cut and fill for zero pavement thickness. These quantities are adjusted for the design pavement thickness provided by OVERLAY (6,0).

OVERLAY(5,0) contains the frost protection design analysis, providing the required depth of frost protection for the applicable design method. This information is used in OVERLAY(3,0).

OVERLAY(6,0) computes and totals all costs and ranks alternatives by their total discounted cost. This overlay summarizes the program results and prepares the output report.

LIFE2 Input

Input for the LIFE2 program includes:

- a. General information to identify the project
- b. Design data
- c. Material properties
- d. Cost data
- e. Traffic data.

Appendix B describes each of the variables used as input. A free-format is used for all input except for information required by the earthwork, frost, and drainage optional analyses. Appendix B also describes the fixed format used for these analyses.

The free-format allows the user to enter the appropriate name or symbol of an input variable followed by its value in any format. The program SCAN,⁵ which is incorporated in OVERLAY(1,0) of LIFE2, enables the computer to identify specific words or word strings appearing on the input cards. When the variable has been identified, the data following the name are read and attached to the appropriate internal program variable. For example, CONCRETE.FLEXURAL STRENGTH 650 is identified by the first letter of each word in the string (CFS). The program then attaches a value of 650 psi to the internal variable designating the flexural strength of concrete. In the case of a single-word variable—WANDER CHANNELIZED—the program recognizes the first four letters in the word (WAND), and then reads and attaches the following word(s) or number(s) to the variable. The computer-identified symbols (e.g., CFS or WAND) may be substituted for the entire variable name in the input. In light of the magnitude of options and input variables available to LIFE2 users, this free-form style makes data input as convenient and error-free as possible.

Vehicle Characteristics

In addition to the input data listed in Appendix B, operation of LIFE2 requires the characteristics of the vehicles for which the pavement is being designed. The vehicle's gross load weight per gear for airfields or axle load for roads, tire contact area, tire or axle spacing, and other data required for either rigid or flexible pavement design must be provided. Since this type of information is innate to the vehicle, it generally will not change. Thus, to reduce the bulk of input data, these characteristics are placed in a vehicle data bank and transferred to the program directly from magnetic tape, disc file, or card storage. Appendix C discusses the contents and use of the LIFE2 vehicle data bank.

3 OPERATING PROCEDURES

Defining the Problem

The LIFE2 program is used in three types of pavement analysis: least first-cost structural thickness design, maintenance strategy selection, and life-cycle design. Defining the type of analysis will establish the set of required input data. Selecting the proper options for decision variables and quantities for other input rele-

⁵SCAN, *User's Manual* (University of Illinois, 1970).

gates the analysis to a specific project. To further define the problem, the user may vary certain input parameters while allowing others to remain constant. For example, the user may wish to evaluate various mix designs; in this case, the material properties input will change. Since this will require multiple program runs, the user can minimize computer time and cut cost by judicious input selection. For instance, if VEHICLE.TYPE, RANGE.OF.THICKNESS, and SUBGRADE.MODULUS remain unchanged, it will be economic to use the "read" option of RIGID.STRUCTURAL.ANALYSIS in subsequent runs.

Design Calculations

The design option generates alternative pavement construction schemes and determines the required

component thickness for both rigid and flexible pavement designs. The solutions are then ranked by lowest estimated construction cost. Figure 4 is a block diagram describing the design calculations.

The design calculations provide the user with several options. The earthwork, drainage, and frost analyses can be performed by the program, circumvented by the user by cost or quantity specification, or excluded completely. In addition, the program can be restricted to either flexible or rigid designs; if it is not, it will generate both types. When designing rigid pavements, the user may input pavement stresses or have the program perform these calculations. Tradeoff between base thickness and slab thickness is also optional in rigid designs. When designing flexible pavements, the

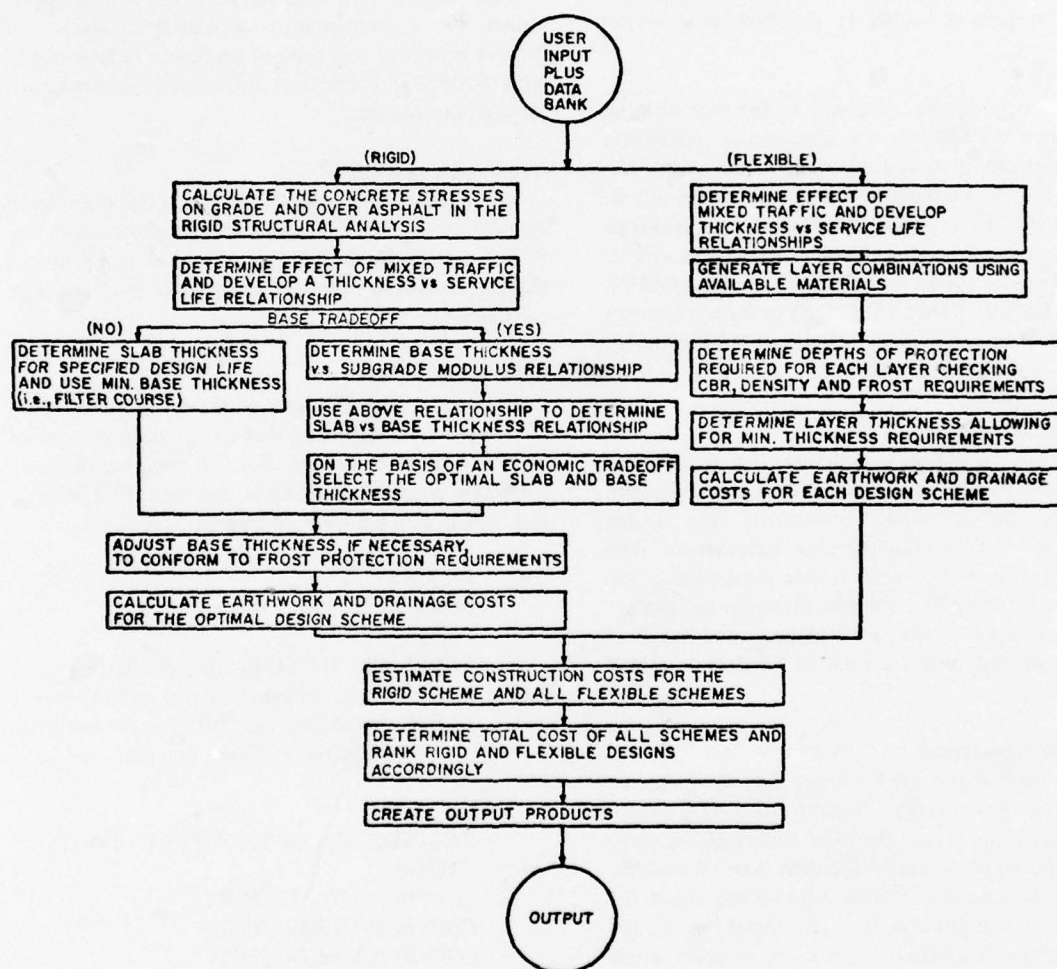


Figure 4. Design calculation procedure.

user may specify the combinations of layers desired or have the program use the input materials to generate all combinations.

In the design calculations, the computed thicknesses are assumed to provide a pavement that will remain serviceable for the entire design life. However, it should be noted that flexible pavements are designed for complete failure,* while rigid pavements are designed for initial failure.*

Maintenance Calculations

Figure 5 illustrates the procedure followed in the maintenance calculations. This procedure considers the pavement's overlay requirements, the M&R, and the user costs, ranking the various maintenance strategies by their total discounted costs (i.e., the costs are discounted to present worth in the first year of the strategy).

The principal options provided to the user with the maintenance calculations are the overlay restriction and the method of computing maintenance costs. The program can be restricted to design either flexible or rigid overlays; if it is not, it will select the optimal type for each time of overlay. Maintenance costs can be specified by cost curves for individual activities (MAINTENANCE.COST.ANALYSIS YES) or by a cost curve for a single parameter which includes all M&R activities (ROUTINE.MAINTENANCE).

Life-Cycle Calculations

Life-cycle calculations combine the design and maintenance procedures; Figure 6 is a block diagram illustrating the calculation procedure. The design schemes for each overlay strategy have service lives equal to the number of years before placement of the first overlay. Rigid and flexible life-cycle designs are saved separately and ranked by total adjusted cost (i.e., construction cost plus the total of all discount M&R costs).

Input Data Preparation

Preparation of the LIFE2 input data is predicated on the type of analysis to be performed (i.e., design, maintenance, or life-cycle). The following sections describe the input necessary for each type of analysis. Appendix B contains detailed information about the input variables and their options, the input format, and default values. Appendix D provides an input worksheet to aid in data preparation.

*See Glossary (Appendix A) for definitions.

Design Calculation

Figure 7 illustrates the set of variables required for the design calculation analysis. To prepare input for this type of problem, the user begins with NAME.OF.BASE and follows the flow of the diagram through the branches chosen. At specific decision points, such as DESIGN.RESTRICTION, the option chosen stipulates the necessary set of data cards.

All blocks in the diagram use either variable or option names. The variables are enclosed in solid blocks, and the options are enclosed by boxes of dashed lines; boxes formed with long dashes separated by dots indicate data required by the associated variable option.

Maintenance Calculation

Figure 8 is a flow diagram of the data card set required for a maintenance calculation analysis. To prepare input for this type of problem, the user begins with NAME.OF.BASE and follows the selected path through the diagram.

Life-Cycle Calculation

Input can be prepared for life-cycle calculation analysis by following the flow diagram shown in Figure 9. The user begins with NAME.OF.BASE and proceeds along the selected branches, as described for the design calculation.

Deck Setup

Following is an example of the LIFE2 deck setup for a typical run, assuming that the program is compiled on a CDC6600 computer. For this case, the input information is submitted on cards, and the LIFE2 program and vehicle data bank are on magnetic tapes.


Job Card
Charge Card

*

LABEL (lfn, L = LIFE, tape parameters)
(tape number/tape ring option)
LABEL (ADATA, L = VDB, tape parameters)
(tape number/tape ring option)

**

lfn.
REWIND(OUT1,OUT2,OUT3,OUT4,OUT5,
OUT6)
COPYBF(OUT1,OUTPUT)
COPYBF(OUT3,OUTPUT)
COPYBF(OUT4,OUTPUT)
COPYBF(OUT5,OUTPUT)
COPYBF(OUT6,OUTPUT)
EXIT.

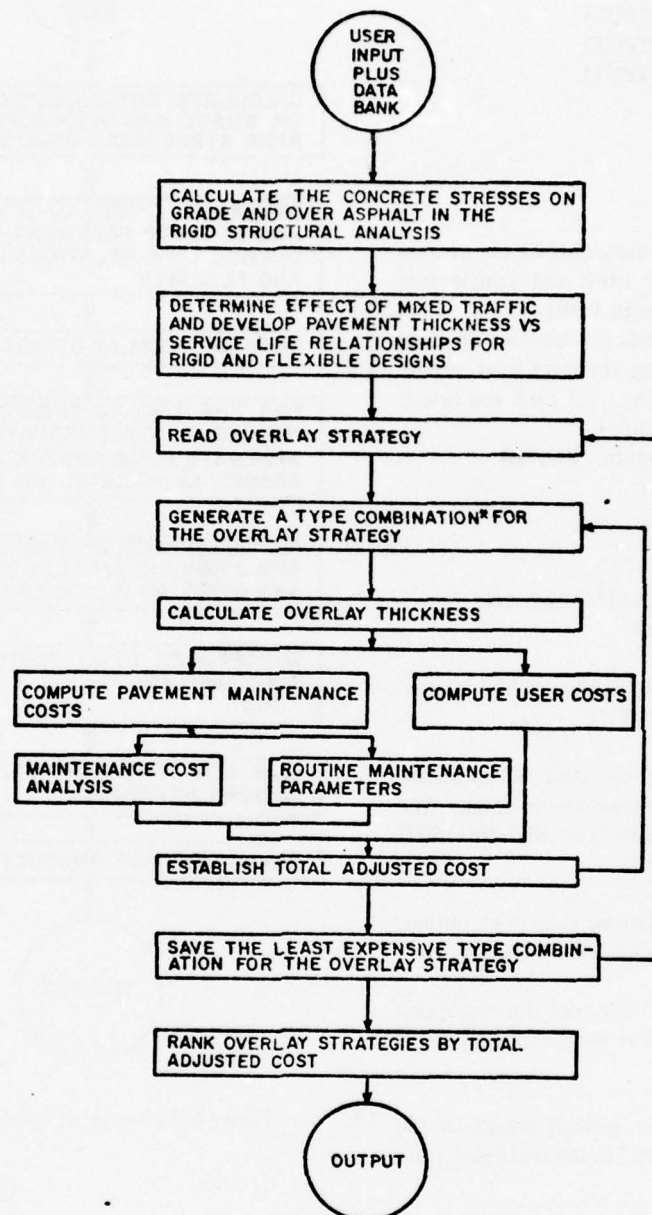

*FOR EXAMPLE, IF THE OVERLAY STRATEGY SPECIFIES OVERLAYS AT 7 AND 15 YEARS, FOUR TYPE COMBINATIONS ARE POSSIBLE: BOTH FLEXIBLE, BOTH RIGID, RIGID AT 7 AND FLEXIBLE AT 15, AND FLEXIBLE AT 7 AND RIGID AT 15.

Figure 5. Maintenance calculation procedure.

```

REWIND(OUT1,OUT2,OUT3,OUT4,OUT5,
OUT6)
COPYBF(OUT1,OUTPUT)
COPYBF(OUT2,OUTPUT)
COPYBF(OUT3,OUTPUT)
COPYBF(OUT4,OUTPUT)
COPYBF(OUT5,OUTPUT)
COPYBF(OUT6,OUTPUT)
7/8/9

```

Input Deck
6/7/8/9

- Notes:
- 1) lfn = logical file name (LIFE2 object code on tape named LIFE and vehicle data bank on tape named VDB)
 - 2) If the vehicle data is submitted on cards rather than using the data bank, delete LABEL (ADATA, . . .) card and insert:
 - * VSN (tape label)
 - ** COPYBR (Input, ADATA)
 - *** Vehicle data
- 7/8/9

Input-Output Files

Twelve tape units are reserved for each LIFE2 computer run. Uses of each unit are:

- Tape 1 — file for the input card deck. The internal designation is INPUT.
- Tapes 2, 3, 5, 7 — scratch files used for temporary storage and communication of data. The internal designations are SF2, SF3, SF5, and SF7.
- Tape 4 — file for the earthwork analysis output. The internal designation is OUT4.
- Tape 6 — output scratch file used for debugging the program. The internal designation is OUT2.
- Tape 8 — output file for general results of the LIFE2 program. The internal designation is OUT1.
- Tape 9 — file for the frost analysis output. The internal designation is OUT3.
- Tape 10 — input storage file for the Vehicle Data Bank. It can be stored on a tape or disc file. The internal designation is ADATA.

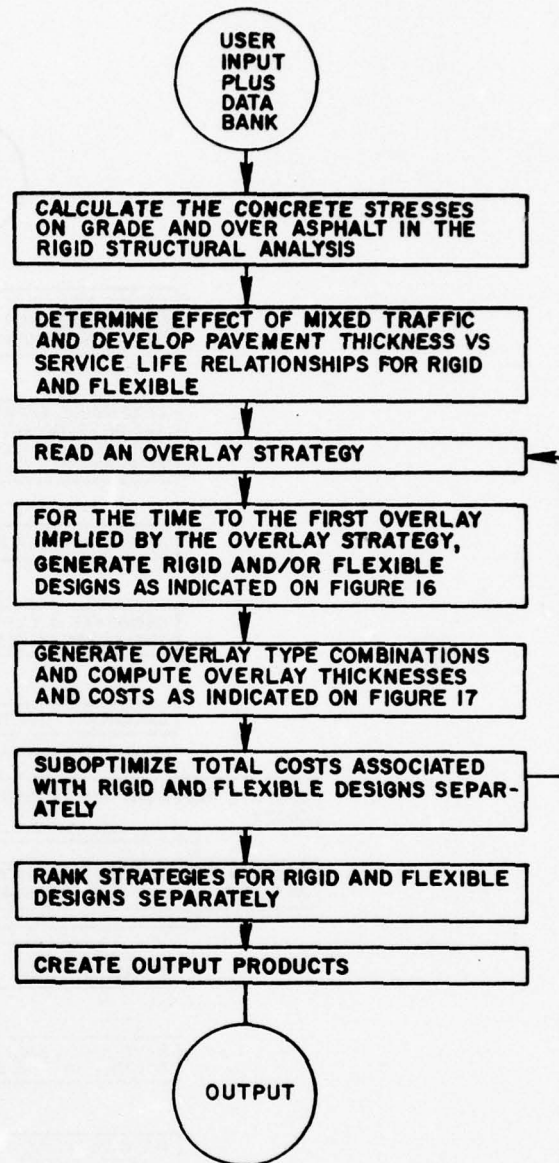


Figure 6. Life-cycle calculation procedure.

- Tape 11 — output file for plotting of the earthwork mass diagram. The internal designation is OUT5.
- Tape 12 — output file for the drainage analysis results. The internal designation is OUT6.

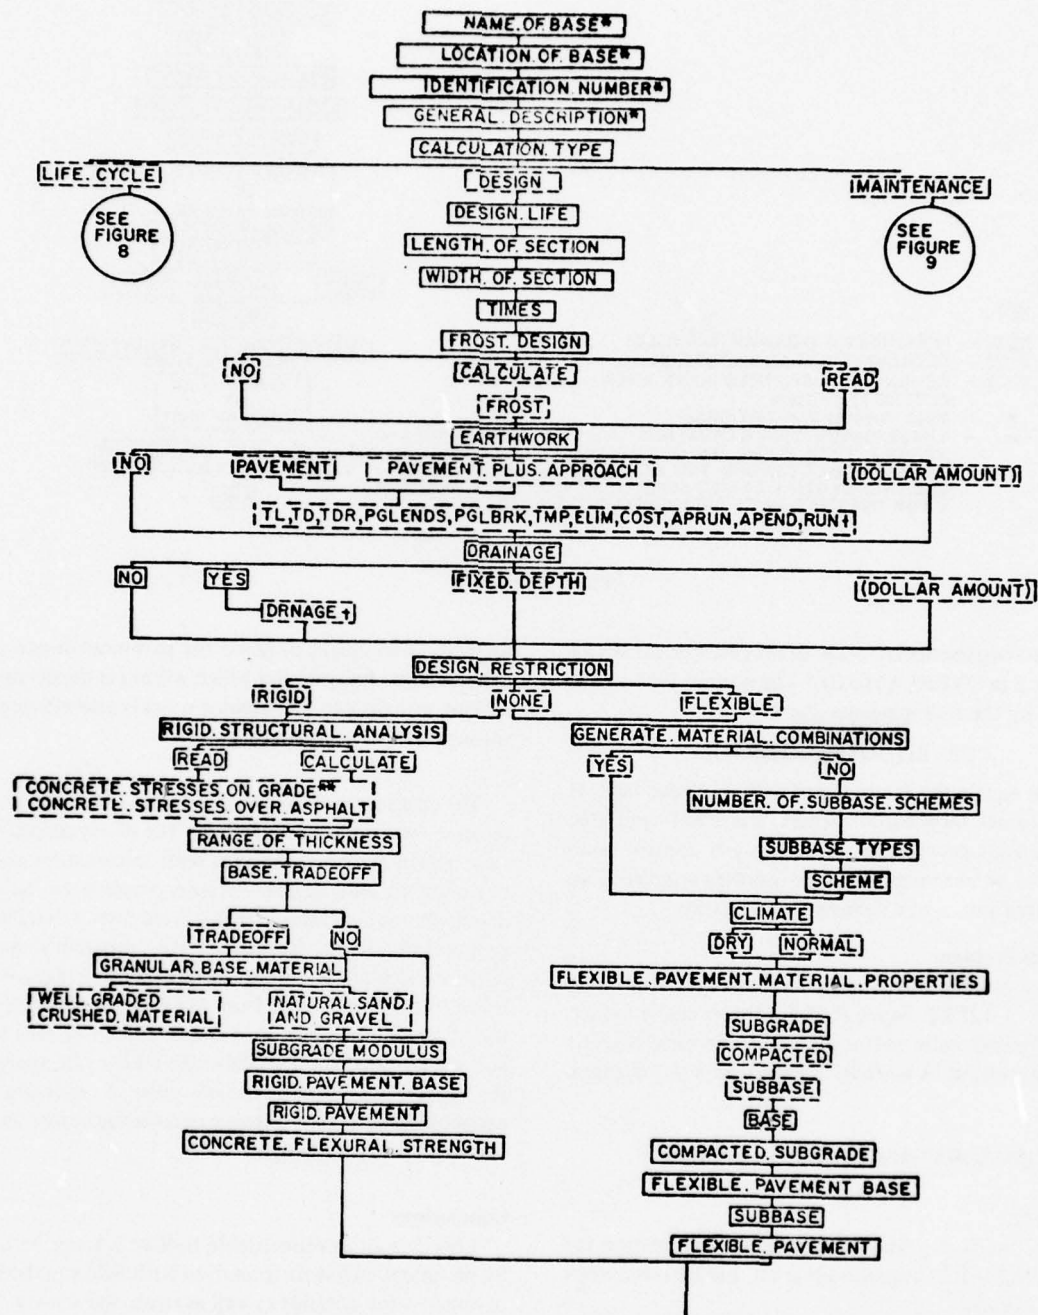


Figure 7. Input for DESIGN calculation.

KEY:

- DESIGNATES A PROGRAM VARIABLE.
- DESIGNATES A VARIABLE OPTION.
- DESIGNATES A REQUIRED INPUT WHEN ASSOCIATED OPTION IS CHOSEN.
- * - THIS VARIABLE IS OPTIONAL.
- ** - THESE CARDS (CSOG & CSOA) MUST FOLLOW THE APPROPRIATE VEHICLE TYPE IN THE INPUT CARD DECK.
- † - THESE BLOCKS CONTAIN THE KEY WORD OR ABBREVIATION USED TO IDENTIFY A FIXED FORM INPUT CARD. SEE APPENDIX C FOR DESCRIPTION OF DATA CONTAINED ON EACH CARD.

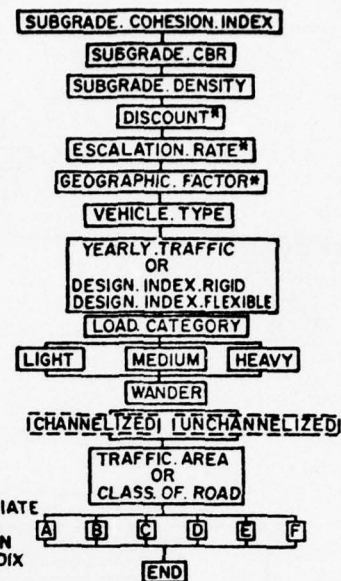


Figure 7 (cont'd).

Type assignments are made in the PROGRAM MAIN (. . .) card in OVERLAY(0,0).* The desired files can be printed by the following command:

COPYBF(OUT n, OUTPUT)

where n equals the internal designation of the tape. If an abnormal termination occurs, the EXIT card (see Deck Setup) causes the remaining job control commands to be executed. Thus, by printing selected files, an aborted run can be debugged more easily.

Example Problem

Appendix E contains an example problem illustrating the use of LIFE2. Input data for the example are explained individually to further clarify the variables. The program output is partially reproduced and discussed.

4 SUMMARY AND CONCLUSIONS

Summary

This report provides the necessary information for using the LIFE2 computer program. LIFE2 is intended

*A complete description of tapes used by individual routines and the contents of the tapes is included in *Systems Approach to Life-Cycle Design of Pavements: Volume II—LIFE2 System Documentation*.

to serve as an engineering aid for pavement design and management. Information which will aid in the decision-making process can be obtained quickly and efficiently through proper program usage.

The program provides the user with life-cycle, maintenance, and design calculations. The life-cycle calculation option provides the user with information about the required maintenance strategy implied by various design alternatives, as well as life-cycle costs, to facilitate economical design decisions. The program's maintenance calculation option can provide information to insure maximum return from M&R funds. If a service life is predetermined, or if a user does not feel that enough information is available for a life-cycle analysis, the design calculation option aids in selecting an economical pavement design based on the construction costs of alternative designs.

Conclusions

LIFE2 is an implementable tool which can be used by pavement engineers to analyze both rigid and flexible pavements for airfields as well as roads and streets. The program evaluates alternative pavement design schemes and/or maintenance and repair strategies and ranks them according to their life-cycle costs. Capability is


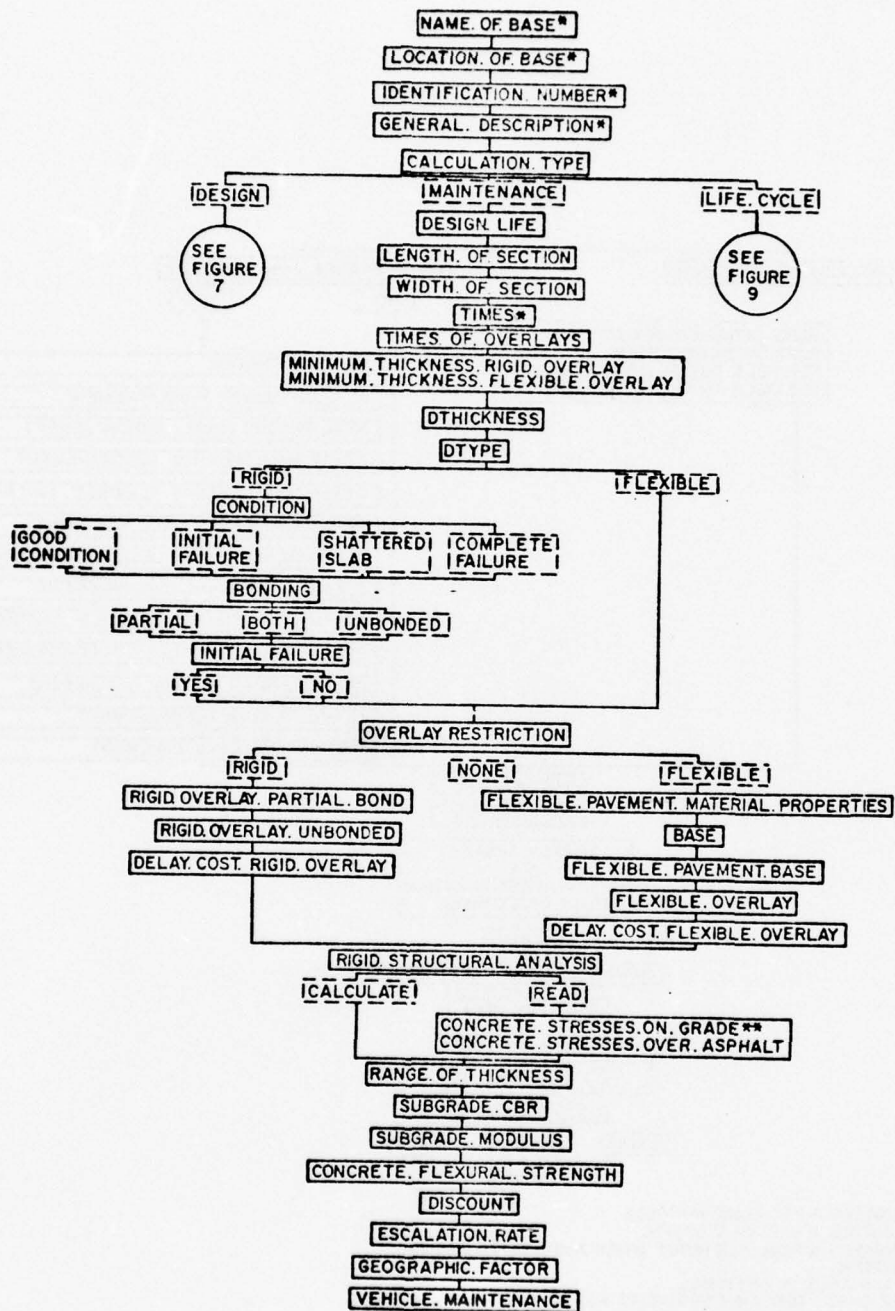


Figure 8. Input for MAINTENANCE calculation.

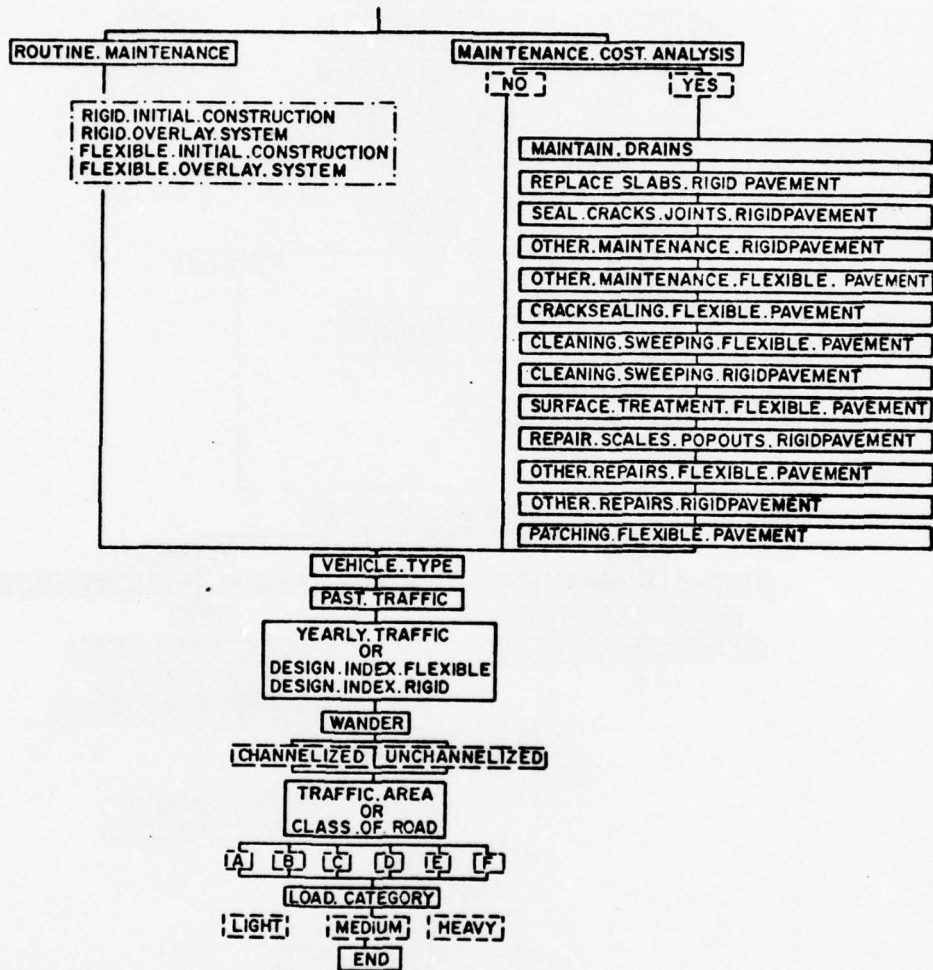

- ▭ - DESIGNATES A PROGRAM VARIABLE.
- ▭ - DESIGNATES A VARIABLE OPTION.
- ▭ - DESIGNATES A REQUIRED INPUT WHEN ASSOCIATED OPTION IS CHOSEN.
- * - THIS VARIABLE IS OPTIONAL.
- ** - THESE CARDS (CSOA & CSOG) MUST FOLLOW THE APPROPRIATE VEHICLE TYPE IN THE INPUT CARD DECK.

Figure 8 (cont'd).

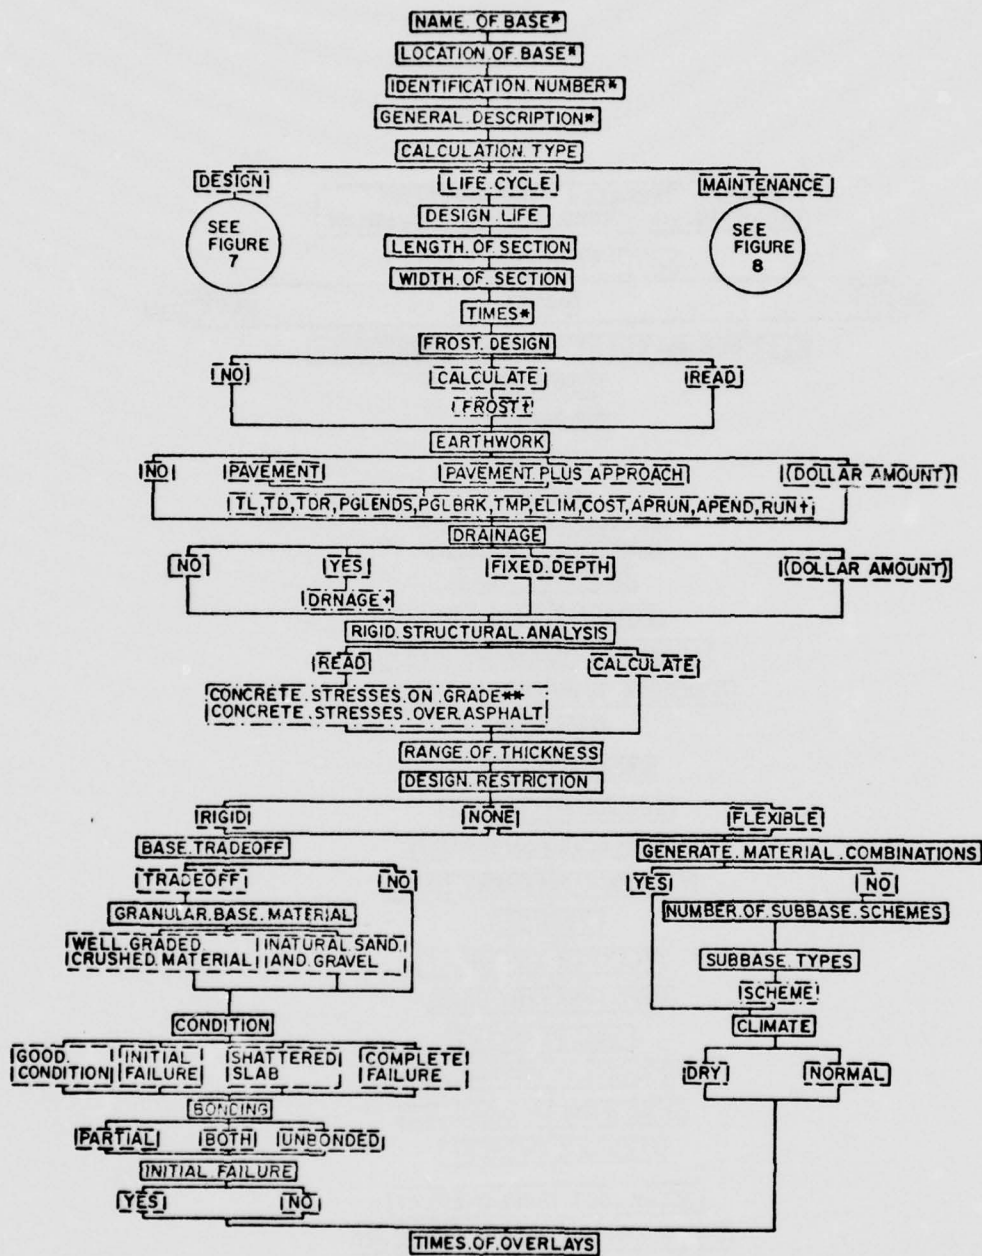


Figure 9. Input for LIFE-CYCLE calculation.


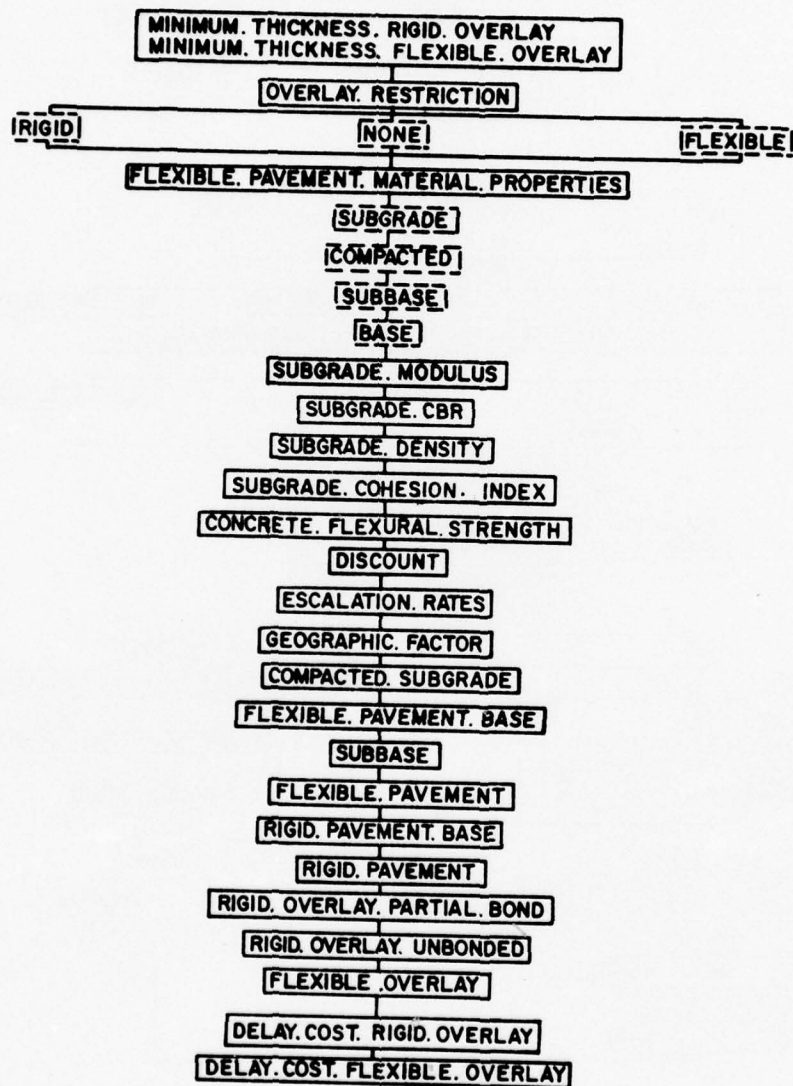


Figure 9 (cont'd).

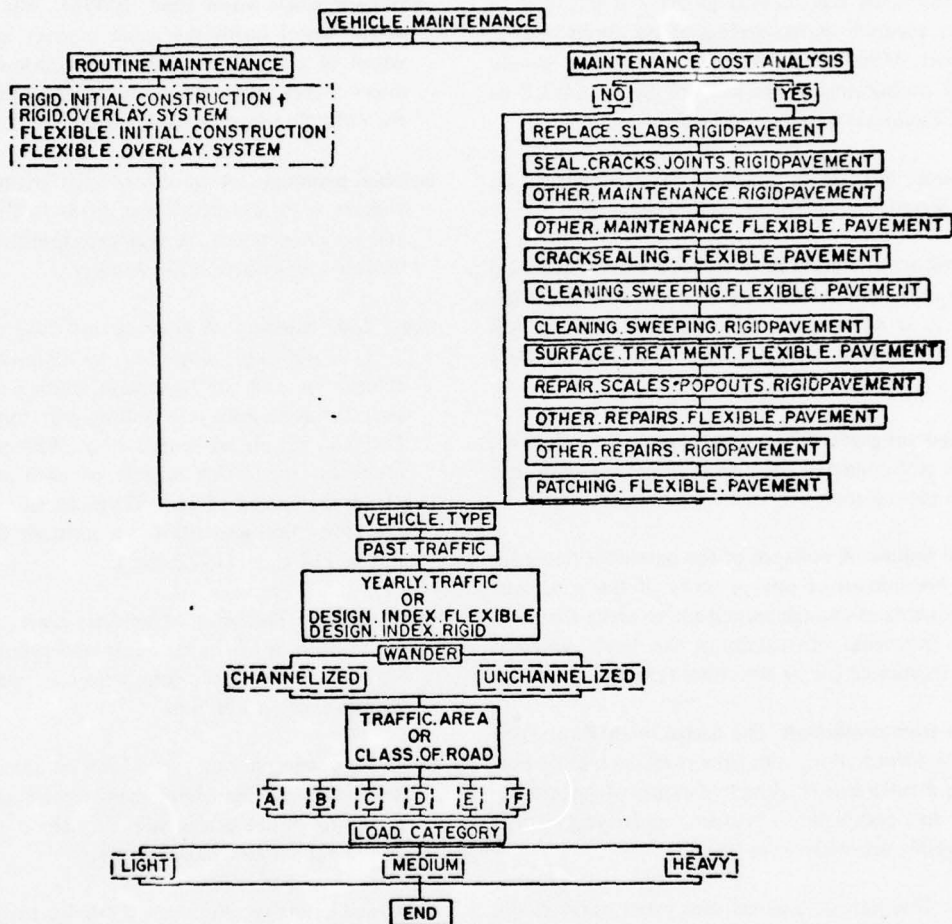

- KEY:
- DESIGNATES A PROGRAM VARIABLE.
 - DESIGNATES A VARIABLE OPTION.
 - DESIGNATES A REQUIRED INPUT WHEN ASSOCIATED OPTION IS CHOSEN
 - * - THIS VARIABLE IS OPTIONAL.
 - ** - THESE CARDS (CSOG & CSOA) MUST FOLLOW THE APPROPRIATE VEHICLE TYPE IN THE INPUT CARD DECK.
 - † - THESE BLOCKS CONTAIN THE KEY WORD OR ABBREVIATION USED TO IDENTIFY A FIXED FORM INPUT CARD. SEE APPENDIX C FOR DESCRIPTION OF DATA CONTAINED ON EACH CARD.

Figure 9 (cont'd).

provided for determining the cost of earthwork, pavement construction, subsurface drainage, maintenance and repair activities, and user-related expenditures incurred during the life of the facility.

APPENDIX A: GLOSSARY OF TERMS

The following alphabetical glossary is included to insure an accurate understanding of the terms used in this report. While most of these terms have widely accepted definitions, some are unique to LIFE2 or Corps of Engineers pavement design procedures.

base course: Natural or processed materials placed on the subgrade or subbase beneath a pavement.

CBR: California Bearing Ratio. CBR is a semi-empirical index of a material's ability to resist shear deformation. It is determined by a penetration-type test (Military Standard MIL-STD-621A, test method 101).

compacted subgrade: The upper part of the subgrade, which is compacted to a density greater than that of the natural soil.

complete failure: A collapse of the pavement structure or a breakdown of one or more of the pavement components of enough magnitude to make the pavement incapable of sustaining the loads imposed upon its surface (i.e., a structural failure).

complete frost protection: The design method in which surface deformation from frost is eliminated by providing a sufficient thickness of nonfrost-susceptible base to completely protect underlying frost-susceptible materials from freezing.

coverage: One pass of a wheel over every point in the tracking lane. In roadways, this is normally equated to a PASS, since traffic is highly channelized.

design index: An index used in designing pavements for roads which represents all traffic expected to use the facility during its life. It is based on typical traffic magnitudes and compositions, reduced to equivalents in terms of repetitions of an 18,000-lb (72.00-kg), single-axle dual-tire load.

design life: The length of time (in years) for which a pavement facility is being designed, including programmed rehabilitation. At the end of this period, the physical life of the facility is considered to be ended, i.e., the pavement structure has deteriorated to a point where total reconstruction would be necessary.

design scheme: A combination of pavement material layers which are to be considered in the structural thickness computations.

equivalent single-wheel load (ESWL): The load on a single wheel (with the same contact area as one wheel of a multiple-wheel configuration) that produces a maximum deflection equal to that beneath the multiple-wheel configuration.

flexible pavement: A pavement that maintains close contact with and distributes loads to the subgrade and which depends on aggregate interlock, particle friction, and cohesion for stability.

heavy load category: A gross aircraft load of 480,000 lb (192,000 kg) supported by twin-twin wheels abreast on each of two main landing gears of an aircraft having a bicycle landing gear configuration. The twin wheels are spaced 37 in. (939 mm) center-to-center; the inside wheels of each set of twin wheels are spaced 62 in. (1575 mm) center-to-center; and each main gear tire has a constant tire contact area of 267 sq in. (1722 cm²).

initial failure: The point at which a crack, originating at the bottom of the structure and propagating upward to the surface, commences to spall or ravel (i.e., a functional failure).

life-cycle design: An analysis which considers the construction, operation, and maintenance of a facility during its entire design life. In LIFE2, cost is the dependent variable in the analysis.

light load category: A gross aircraft load of 60,000 lb (24,000 kg) is supported by a single wheel with a constant tire-contact area of 100 sq in. (645 cm²) on each of the two main landing gears of an aircraft with a tricycle landing gear configuration.

limited subgrade frost protection: The design method which attempts to hold surface deformations to small, acceptable values, instead of eliminating them completely. This is the normal method of design.

maintenance: An activity necessary to keep a pavement operable at its present structural condition (e.g., patching, sealing joints).

maintenance strategy: A composite of an overlay strategy, routine maintenance, vehicle maintenance, and overlay delay costs.

medium load category: A gross aircraft load of 320,000 lb (128,000 kg) supported by twin tandem wheels on each of two main landing gears of an aircraft having a tricycle landing gear configuration. The twin wheels are spaced 32.5 in. (825.5 mm) center-to-center, and each main gear tire has a constant tire-contact area of 208 in. (1342 cm²).

overlay delay costs: Costs incurred during structural pavement overlay construction resulting from shifting of operations to other pavement facilities or to another base.

overlay pavement: Pavement superimposed on existing pavement and base to reinforce its load-carrying capacity.

overlay strategy: Points in time when structural pavement overlays are scheduled to be constructed.

pass: One operation of a vehicle—in airfield usage, a take-off and a landing; in road usage, one movement of the vehicle over the design section.

pavement: A surface of prepared or manufactured material superimposed upon the base, subbase, or subgrade either as a structural member or as a weather- and abrasion-resistant medium.

pavement management: The entire process of providing an adequate paved surface for transportation facilities, including design, construction, maintenance, rehabilitation, and replacement.

program overlay: In computer terminology, a program overlay is a subprogram of the main system which resembles a complete computer program. When called by the main program, the overlay is loaded and executes a specific analysis, using data transferred from common storage or from external inputs.

reduced subgrade strength: A frost design method based on allowing a reduction in subgrade strength during thawing periods.

repair: Structural restoration of a failed or fading section of pavement to enable fulfillment of its designated purpose (e.g., overlay).

rigid pavement: A pavement structure that distributes loads to the subgrade; one of its courses is a portland cement concrete slab having relatively high bending resistance.

routine maintenance: A cost category intended to reflect a pattern of routine maintenance and repair activities that might take place during a pavement's service life. It would include such activities as surface treatments, patching, joint and crack sealing, slab jacking, and thin overlays. An estimate of expenditures for such activities must be determined over time by the program user and input as a piece-wise linear function of duration. The maintenance must be comprehensive enough so that a pavement remains serviceable throughout its life.

service life: The length of time (in years) that a pavement facility is used for its major intended function without extensive rebuilding (e.g., structural overlaying).

subbase: A layer used in a pavement system between the subgrade and the base course.

subgrade: The natural soil or the fill material upon which a pavement, base, or subbase course is constructed.

subsurface drainage system: A subsurface draining system comprising facilities to collect and dispose of water occurring below the surface of the ground (pavement) and constituting a threat to health or to adequacy, stability, or proper maintenance of structures, pavements, grounds, and utilities. Subsurface draining facilities include open-jointed, perforated, or porous collector pipes, conduits, observation risers, cleanouts, filters, blind drains, outlet structures, and appurtenant works as required.

type A traffic area: Pavement facilities that receive the channelized traffic and full design weight of heavy multiple-wheel bomber and cargo aircraft.

type B traffic area: Facilities in which the traffic is more evenly distributed over the full width of the pavement but which receive the full weight of the aircraft during operations.

type C traffic area: Facilities in which the traffic volume is low or in which the weight of the operating aircraft is generally less than the design weight.

type D traffic area: Facilities in which the traffic volume is extremely low and the weight of operating aircraft is considerably lower than the design weight.

vehicle maintenance: A cost estimate which includes expected costs of vehicle repairs necessitated by pavement roughness and expected costs due to the probability of accidents caused by slipperiness.

APPENDIX B: PROGRAM VARIABLES

Variables used in the LIFE2 program are divided into two categories: free-form and fixed-form input.

In free-form input, the variable name must begin within a card's first nine columns. If the variable contains more than one word, a period must be used to separate each. The variable's option or value must begin with the next nine card columns. There must be at least one blank column between the variable and its value; blanks may not appear within a variable name or its value. More than one variable may be placed on the same data card if the second variable begins within nine columns of the first; however, the program ignores data in columns 73-80. If the program encounters ten or more blank spaces, it skips to the next card and searches for a new variable.

The fixed format is used to provide data for three variables: EARTHWORK, DRAINAGE, and FROST.DESIGN.

In addition to format requirements, the following sequence requirements must be followed:

1. DESIGN.LIFE must precede VEHICLE.TYPE.
2. VEHICLE.TYPE must immediately precede YEARLY.TRAFFIC and PAST.TRAFFIC for the specific aircraft or DESIGN.INDEX for roadway pavements.
3. If the RIGID.STRUCTURE.ANALYSIS option is READ, the CSOA and CSOG cards must immediately follow YEARLY.TRAFFIC for the vehicle being considered.
4. FLEXIBLE.PAVEMENT.MATERIAL.PROPERTIES must precede all cost data.
5. The SUBGRADE, COMPACTED, SUBBASE, and BASE information cards must directly follow the FLEXIBLE.PAVEMENT.MATERIAL.PROPERTY header card.
6. The complete set of data must be followed by a card having the word END punched within its first nine columns. This card indicates the end of the punched-card input deck and is separate from the control language end-of-information or separator cards.

Table B1 is an index for finding the page in the Variable Name Section on which a specific variable is defined. The description of input for the example problem in Appendix E can be used to further clarify input preparation.

Free-Form Variable Descriptions

Variables using free-form input are defined in this section; where applicable, the variable's allowable options are given and defined. To provide a logical pattern for input preparation, the related variables are categorically arranged as follows:

1. General information
2. Design data
3. Material properties
4. Cost data
5. Traffic data.

Table B1
Variable Names

Free-Form Input Variable	Abbreviation	Page
BASE. TRADEOFF	BT	31
BONDING	BOND	33
CALCULATION. TYPE	CT	30
CLASS. OF. ROAD	COR	41
CLEANING. SWEEPING. FLEXIBLE. PAVEMENT	CSFP	39
CLEANING. SWEEPING. RIGID PAVEMENT	CSR	39
CLIMATE	CLIM	33
COMPACTED. SUBGRADE	CS	35
CONCRETE. FLEXURAL. STRENGTH	CFS	35
CONCRETE. STRESSES. ON. GRADE	CSOG	31
CONCRETE. STRESSES. OVER. ASPHALT	CSOA	30
CONDITION	COND	34
CRACK SEALING. FLEXIBLE. PAVEMENT	CFP	38
DELAY. COST. FLEXIBLE. OVERLAY	DCFO	36
DELAY. COST. RIGID. OVERLAY	DCRO	36
DESIGN. INDEX. FLEXIBLE	DIF	40
DESIGN. INDEX. RIGID	DIR	40
DESIGN. LIFE	DL	30
DESIGN. RESTRICTION	DR	31
DISCOUNT	DISC	36
DRAINAGE	DRAI	32
DTHICKNESS	DTHI	34
DTYPE	DTYP	33
EARTHWORK	EART	32
ESCALATION. RATE	ER	36
FLEXIBLE. OVERLAY	FO	36
FLEXIBLE. PAVEMENT	FP	36
FLEXIBLE. PAVEMENT. BASE	FPB	36
FLEXIBLE. PAVEMENT. MATERIAL. PROPERTIES	FPMP	34
FROST. DESIGN	FD	31
GENERAL. DESCRIPTION	GD	30
GENERATE. MATERIAL. COMBINATIONS	GMC	32
GEOGRAPHIC. FACTOR	GF	36
GRANULAR. BASE. MATERIAL	GBM	35
IDENTIFICATION. NUMBER	IN	29
INITIAL. FAILURE	IF	34
LENGTH. OF. SECTION	LOS	30
LOAD. CATEGORY	LC	40
LOCATION. OF. BASE	LOB	29
MAINTENANCE. COST. ANALYSIS	MCA	37
MAINTAIN. DRAINS	MD	37
MINIMUM. THICKNESS. FLEXIBLE. OVERLAY	MTFO	33
MINIMUM. THICKNESS. RIGID. OVERLAY	MTRO	33
NAME. OF. BASE	NOB	29
NUMBER. OF. SUBBASE. SCHEMES	NOSS	32
OTHER. MAINTENANCE. FLEXIBLE. PAVEMENT	OMFP	38
OTHER. MAINTENANCE. RIGID PAVEMENT	OMR	38
OTHER. REPAIRS. FLEXIBLE. PAVEMENT	ORFP	39
OTHER. REPAIRS. RIGID PAVEMENT	ORR	39
OVERLAY. RESTRICTION	OR	31
PAST. TRAFFIC	PT	40
PATCHING. FLEXIBLE. PAVEMENT	PF	38
RANGE. OF. THICKNESS	ROT	31

Table B1 (cont'd)

Free-Form Input Variable	Abbreviation	Page
REPAIR.SCALES.POPOUTS.RIGIDPAVEMENT	RSPR	38
REPLACE.SLABS.RIGIDPAVEMENT	RSR	39
RIGID.OVERLAY.PARTIAL.BOND	ROPB	36
RIGID.OVERLAY.UNBONDED	ROU	36
RIGID.PAVEMENT	RP	36
RIGID.PAVEMENT.BASE	RPB	36
RIGID.STRUCTURAL.ANALYSIS	RSA	30
ROUTINE.MAINTENANCE	RM	37
SEAL.JOINTS.CRACKS.RIGIDPAVEMENT	SJCR	38
SUBBASE	SUBB	36
SUBBASE.TYPES	ST	32
SUBGRADE.CBR	SC	35
SUBGRADE.COHESSION.INDEX	SCI	35
SUBGRADE.DENSITY	SD	35
SUBGRADE.MODULUS	SM	35
SURFACE.TREATMENT.FLEXIBLE.PAVEMENT	STFP	38
TIMES	TIME	31
TIMES.OF.OVERLAYS	TOO	33
TRAFFIC.AREA	TA	41
VEHICLE.MAINTENANCE	VM	37
VEHICLE.TYPE	VT	40
WANDER	WAND	40
WIDTH.OF.SECTION	WOS	30
YEARLY.TRAFFIC	YT	40

General Information

<i>Variable</i>	<i>Description</i>
NAME.OF.BASE	The name of the installation in which the pavement is to be located. The name must be enclosed in quotes and can be no longer than 20 characters. ^{a*}
LOCATION.OF.BASE	The installation's location (state, district, country). The location must be enclosed in quotes and can be no longer than 32 characters. ^a
IDENTIFICATION.NUMBER	The project's identification number must be enclosed in quotes and cannot be longer than 12 characters. ^a

*Footnotes are provided at the end of this section.

<i>Variable</i>	<i>Description</i>
GENERAL.DESCRPTION	This variable allows up to 10 output lines for a general description of the project. One card may contain a maximum of 60 characters; two cards constitute one line of output. Thus, the maximum field is 1200 characters. Quotes must be placed at the beginning and end of each portion of a statement on every card. The description may be alphanumeric; however, a dollar sign may not be used. ^a
<i>Design Data</i>	
CALCULATION.TYPE	Specifies the type of analysis to be performed. ^b Options: DESIGN MAINTENANCE LIFE.CYCLE
DESIGN.LIFE	The design life of the pavement in years. This variable must precede the definition of traffic (i.e., VEHICLE.TYPE) in the input. ^b
LENGTH.OF.SECTION	The length of pavement in the section being considered (in feet). ^b
WIDTH.OF.SECTION	The width of pavement in the section being considered (in feet). ^b
RIGID.STRUCTURAL.ANALYSIS	Provides the option of having rigid pavement stresses (CSOA and CSOG) either calculated* or read. In the READ option, the user can omit redundant calculations by using results from a previous run as input. (Both CSOA and CSOG must be input in this option regardless of the type of problem.) CALCULATE produces a set of stresses (in psi) for 10 pavement thicknesses based on RANGE.OF.THICKNESS. Options: READ CALCULATE Default: ^c CALCULATE
CONCRETE.STRESSES.OVER.ASPHALT	A set of 10 rigid pavement stresses used when the READ options of RSA are selected. To use results of a previous run, the problem must have the same VEHICLE.TYPE, RANGE.OF.THICKNESS, and SUBGRADE.MODULUS as that of the previous run. Since the stresses are unique to VEHICLE.TYPE, they must be placed immediately after YEARLY.TRAFFIC for that vehicle. ^f

*The stress calculations follow the method presented in W. C. Kreger, *Computerized Aircraft Ground Flotation Analysis—Edge-Loaded Rigid Pavement*, Report ERR-FW-572 (General Dynamics Corp., 1967).

<i>Variable</i>	<i>Description</i>
CONCRETE.STRESSES.ON.GRADE	CSOG has the same requirements as CSOA. Note that both must be input when using the READ option. ^f
DESIGN.RESTRICTION	Option code stipulating restrictions on the type of pavement design. ^d Options: NONE RIGID FLEXIBLE Default: NONE
OVERLAY.RESTRICTION	Option code stipulating restrictions on the type of overlay to be considered. ^e Options: NONE RIGID FLEXIBLE Default: NONE
RANGE.OF.THICKNESS	Minimum and maximum thicknesses expected to be encountered in the design of rigid pavements or overlays. This range is used to establish units for the CSOA and CSOG calculations. ^b
TIMES	Years during the design life in which the user desires a required pavement thickness to be calculated. This variable is used to develop thickness vs. time (service life) curves. The first value must be 1, and the maximum value must equal the design life. The number of points must not exceed 20. If this variable is not part of the input, the program selects 6 equally spaced values (e.g., 1, 4, 8, 12, 16, and 20 would be used for a design life of 20). ^a
BASE.TRADEOFF	In rigid pavement design, this variable provides the option of having the program consider a tradeoff between the thickness of base course and the thickness of PCC slab. ^d Options: NO TRADEOFF Default: NO
FROST.DESIGN	This option code specifies whether frost criteria will be considered in the design. ^d CALCULATE determines the required depth of frost protection for each design scheme. READ is followed by the user's estimate of the required depth of protection (in inches). Both the rigid and the flexible design schemes will use this quantity as the required depth of nonfrost-susceptible material. Options: NO CALCULATE ^h READ Default: NO

<i>Variable</i>	<i>Description</i>
EARTHWORK	<p>An option code which determines whether an earthwork analysis will be performed for the various pavement thickness designs. PAVEMENT computes the earthwork quantity for the paved areas only. PAVEMENT.PLUS.APPROACH includes the earthwork in airfield approach zones. The final option is to input the cost in dollars (without the dollar sign) as an integer number. This cost will be included as a lump sum in every design scheme (i.e., earthwork is then a constant).</p> <p>Options: NO PAVEMENT^h PAVEMENT.PLUS.APPROACH^h (dollar amount)</p> <p>Default: NO</p>
DRAINAGE	<p>This option code determines whether the cost of subsurface drainage will be included in the project analysis.^d YES determines the cost, if any, of subsurface drainage for each thickness design. FIXED.DEPTH must be followed by the required depth (in inches) to the underdrain (from top of subgrade to center of pipe). The final option is the user's estimate of the total cost of underdrains (input as an integer without the dollar sign). This will be included as a lump sum in every design scheme (i.e., drainage is then a constant).</p> <p>Options: NO YES^h FIXED.DEPTH^h (dollar amount)</p> <p>Default: NO</p>
GENERATE.MATERIAL.COMBINATIONS	<p>Option code which specifies whether subbase combinations for the design of flexible pavements will be generated by the program or input by the user.^d</p> <p>Options: YES NO</p> <p>Default: YES (i.e., all combinations generated by the program).</p>
NUMBER.OF.SUBBASE.SCHEMES	<p>If the material combinations are input (i.e., GMC option NO), this variable must be used to specify the number of subbase schemes being considered by the user. Each scheme designates the combination of subbases to be used in the design.^d</p>
SUBBASE.TYPES	<p>This variable is the heading used for reading the subbase schemes desired by the user. This is necessary if GMC option NO is selected. The heading is followed by a series</p>

*Variable**Description*

	of statements (up to 20) specifying SCHEME, a sequence number, and the numbers of the subbase materials which are to be considered in combination in that scheme. The subbase material numbers are those assigned to the material in the variable FLEXIBLE.PAVEMENT.MATERIAL.PROPERTIES. ^d
CLIMATE	<p>Option code for considering moisture conditions in the design of flexible pavements. The DRY option is selected if the annual precipitation is less than 15 in. (381 mm), the water table is at least 15 ft (4.5 m) below finished grade, and if the moisture content of the subgrade is not anticipated to exceed the optimum. This option reduces the total pavement thickness above the subgrade by 20 percent.^d</p> <p>Options: NORMAL DRY Default: NORMAL</p>
TIMES.OF.OVERLAYS	<p>This variable is the heading for the input of overlay strategies (i.e., the projected time spacing for overlays). The heading is followed by a series of statements (up to 10) specifying STRATEGY, a sequence number, and the years when the user predicts the need for structural overlays. If the sequence number is followed by blanks, it is assumed that an overlay will not be required during the design life of the pavement.^c</p>
MINIMUM.THICKNESS.FLEXIBLE.OVERLAY	<p>A decimal number specifying the minimum allowable thickness for a flexible overlay.^c</p> <p>Default: 4.0</p>
MINIMUM.THICKNESS.RIGID.OVERLAY	<p>A decimal number specifying the minimum allowable thickness for a rigid overlay.^c</p> <p>Default: 5.0</p>
BONDING	<p>This variable designates whether the bonding between a rigid overlay and a rigid existing pavement will be partial or unbonded.^c The program will select the more economical of the two when the option is BOTH.</p> <p>Options: PARTIAL UNBONDED BOTH Default: BOTH</p>
DTYPE	<p>Defines the existing pavement type.^c</p> <p>Options: RIGID FLEXIBLE</p>

<i>Variable</i>	<i>Description</i>
DTHICKNESS	Defines the thickness of the existing pavement—total thickness if DTYPE is FLEXIBLE, and slab thickness if DTYPE is RIGID. ^c
INITIAL.FAILURE	<p>Specifies whether a flexible overlay over a rigid pavement system will be designed for initial failure. If YES, the F factor in the overlay design equation is set to 1.0; if NO, the factor is determined based on the modulus of subgrade reaction.^c</p> <p>Options: YES NO Default: YES</p>
CONDITION	<p>Option code for classifying the condition of the existing rigid pavement; this will be used to calculate the required thickness of the overlay.^c Based on this classification, the C factor in the applicable thickness design equation will be given the following values:</p> <p>INITIAL.FAILURE — C = 0.75 for rigid overlay C = 1.00 for flexible overlay</p> <p>SHATTERED.SLAB — C = 0.50 for rigid overlay C = 0.75 for flexible overlay</p> <p>COMPLETE.FAILURE — C = 0.35 for rigid overlay Flexible overlays will not be considered.</p> <p>GOOD.CONDITION — C = 1.00 for rigid overlay C = 1.00 for flexible overlay</p> <p>Options: GOOD.CONDITION INITIAL.FAILURE SHATTERED.SLAB COMPLETE.FAILURE Default: GOOD.CONDITION</p>

Material Properties

FLEXIBLE.PAVEMENT.MATERIAL.PROPERTIES	<p>This variable is the heading for input of the properties of flexible pavement design materials. This heading must immediately precede the list of material variables and all cost data in the input deck. The material variables included under this heading are SUBGRADE, COMPACTED, SUBBASE, and BASE. BASE is limited to two materials; other layers may have up to nine materials to be considered by the program. The properties necessary for each material are: SUBGRADE (number) (CBR) (density) (thickness) (cohesion) (frost susceptibility); SUBBASE (number) (CBR) (density) (cohesion) (frost susceptibility); BASE (number) (CBR).</p>
---------------------------------------	---

Variable

Description

These properties are interpreted as follows:

- (1) Number is the sequence assigned to differentiate between alternative materials in a layer.
- (2) The sequence numbers for SUBGRADE must be arranged beginning with the lowest layer.
- (3) CBR and density are the values expected in the field after compacting the material to the construction specification. Density is in percent of CE55 maximum dry density.
- (4) The thickness of each SUBGRADE layer must be input (in inches).
- (5) Cohesion is specified as either cohesive or cohesionless. This property defines the post-construction condition of the materials.
- (6) Frost susceptibility is designated as FS (frost susceptible) or NFS (nonfrost-susceptible).
- (7) BASE CBR must be 50, 80, or 100.

SUBGRADE.COHESSION.INDEX

Defines the cohesion and frost susceptibility of the natural subgrade material.^d

Options: COHESIONLESS FS or NFS
COHESIVE FS or NFS

SUBGRADE.CBR

Defines the CBR of the subgrade material in the natural undisturbed state.^b

SUBGRADE.DENSITY

Defines the density of the undisturbed subgrade material. It is expressed as percent of CE55 maximum dry density (up to a maximum of 100 percent).^d

SUBGRADE.MODULUS

Defines the modulus of subgrade reaction (in pci).^b

GRANULAR.BASE.MATERIAL

Describes the base material. This variable is necessary for BASE.TRADEOFF in the rigid pavement design.^{d*}

Options: WELL.GRADED.CRUSHED.MATERIAL
NATURAL.SAND.AND.GRAVEL

CONCRETE.FLEXURAL.STRENGTH

Defines the design flexural strength of the portland cement concrete to be used (in psi).^b

Cost Data

COMPACTED.SUBGRADE

These data define a thickness (inches) vs. cost (\$) curve for each material considered. The data string includes: variable name; sequence number (coinciding with that assigned in FPMP); an alphanumeric description in quotes (optional—no longer than 28 characters); and a set of

*Rigid Pavements for Airfields Other Than Army, TM 5-824-3 (Department of the Army, 7 December 1970).

*Variable**Description*

	thickness vs. cost pairs (up to nine pairs to define the curve). The use of data corresponding to 1 in. (25.4 mm) of material is not intended to imply that material would be placed at 1 in. (25.4 mm) at that price, but rather to set an end point to the cost function. (See Figure B1.) For values greater than the input data, linear extrapolation of the final curve segment is performed for all cost data.
FLEXIBLE.PAVEMENT.BASE	Same as above.
SUBBASE	Same as above.
RIGID.PAVEMENT.BASE	Same as above.
FLEXIBLE.OVERLAY	Same as above.
FLEXIBLE.PAVEMENT	Same as above.
RIGID.OVERLAY.PARTIAL.BOND	Same as above.
RIGID.OVERLAY.UNBONDED	Same as above.
RIGID.PAVEMENT	Same as above. This relationship is also used to compute the cost of rigid overlays over flexible pavement.
DELAY.COST.FLEXIBLE.OVERLAY	<p>A lump sum (in dollars) reflecting the cost of closing the facility during construction of a flexible overlay.^c</p> <p>Default: 0.0</p>
DELAY.COST.RIGID.OVERLAY	<p>A lump sum (in dollars) reflecting the cost of closing the facility during construction of a rigid overlay.^c</p> <p>Default: 0.0</p>
DISCOUNT	<p>Rate (given as a decimal) used to express costs in terms of present worth. This value may include the escalation rate.</p> <p>Default: 0.0</p>
ESCALATION.RATE	<p>Rate (given as a decimal) used to escalate dollar amounts to account for the effects of inflation.</p> <p>Default: 0.0</p>
GEOGRAPHIC.FACTOR	<p>Factor used to adjust costs to account for variation in a project's geographic location.</p> <p>Default: 1.00</p>

Variable

Description

VEHICLE.MAINTENANCE

This variable allows the user to include an estimate of anticipated vehicle maintenance costs caused by pavement roughness, slipperiness, or structural failures.^c It is input as a time (years) vs. cost (\$) curve. Up to nine pairs of time and cost data can be used to define the curve. The maximum time used must be greater than the maximum service life of the facility. Time for this variable is reset at zero after completion of each structural overlay or reconstruction activity. (See Figure B2).

ROUTINE.MAINTENANCE

This variable is a general estimate of the cost/sq yd which is anticipated to be incurred between structural upgradings (overlay or reconstruction) to maintain a functionally serviceable facility.^c It is input as a time (years) vs. cost (\$/sq yd) curve. Up to nine pairs of time and cost data can be used to define the curve. The maximum time used must be greater than the maximum service life of the facility. Since the cost of maintaining various pavement systems differs, this variable is divided into four categories, each having a cost curve. An example of input showing the four categories is:

ROUTINE.MAINTENANCE	RIGID.INITIAL.CONSTRUCTION	1	.01	20	.03
ROUTINE.MAINTENANCE	RIGID.OVERLAY.SYSTEM	1	.01	20	.08
ROUTINE.MAINTENANCE	FLEXIBLE.INITIAL.CONSTRUCTION	1	.01	20	.05
ROUTINE.MAINTENANCE	FLEXIBLE.OVERLAY.SYSTEM	1	.01	20	.12

The abbreviations RIC, ROS, FIC, and FOS can be used in place of the category names in the input. (See Figure B3.)

Default: (all ROUTINE.MAINTENANCE costs are defaulted to zero)

MAINTENANCE.COST.ANALYSIS

Option code which specifies whether a maintenance cost analysis will be performed.

Options: YES

NO

Default: NO

MAINTAIN.DRAINS

The estimated cost of maintaining the drainage system. The decimal following the variable is the cost/sq yd of pavement. The second number, an integer, is the year in which this cost will be applied in the analysis. For example, MAINTAIN.DRAINS 0.95 3 indicates that a cost of \$0.95 times the pavement area will be applied every third year (i.e., in year 3, 6, 9, etc.). (See Figure B4.)

Default: .0 1

<i>Variable</i>	<i>Description</i>
SEALJOINTS.CRACKS.RIGIDPAVEMENT	<p>The estimated cost of sealing joints and cracks in rigid pavements. This variable is input in the same manner as MAINTAIN.DRAINS.</p> <p>Default: .02 7</p>
OTHER.MAINTENANCE.FLEXIBLE.PAVEMENT	<p>This variable provides the user with the flexibility of accounting for the cost of flexible pavement maintenance activities other than those specifically listed as variables. It is input in the same manner as MAINTAIN.DRAINS.</p> <p>Default: .0 1</p>
OTHER.MAINTENANCE.RIGIDPAVEMENT	<p>This variable is the same as that listed for OTHER.MAINTENANCE.FLEXIBLE.PAVEMENT except that it describes rigid pavement maintenance.</p> <p>Default: .0 1</p>
CRACKSEALING.FLEXIBLE.PAVEMENT	<p>As the estimated cost of cracksealing for flexible pavements, this variable is followed by one decimal number which is the cost per sq yd. This cost is accrued annually.</p> <p>Default: .01</p>
SURFACE.TREATMENT.FLEXIBLE.PAVEMENT	<p>This variable is an estimate of surface treatments applied to flexible pavements. It is followed by one decimal number, which is the surface treatment cost per sq yd. The cost is applied as follows: if an overlay is not planned within the first 8 years, a surface treatment is placed during the fifth year; if an overlay is not planned during the sixth to thirteenth years, surface treatment is placed during the tenth year, etc. If an overlay is scheduled within the 8-year period, the surface treatment is deleted, and the next 8-year period is begun from the time of the overlay; when the design life ends within the 8-year period, no surface treatment is placed, and the calculations stop.</p> <p>Default: 0.41</p>
PATCHING.FLEXIBLE.PAVEMENT	<p>The cost estimate for this variable is given as cost per sq yd of pavement. This cost is applied during each year of the design life.</p> <p>Default: .02</p>
REPAIR.SCALING.POPOUTS.RIGIDPAVEMENT	<p>This variable is an estimate of the cost to repair scaling and popouts. The input value is in \$/sq yd. This cost is applied using the relationship:</p> $\text{Cost} = A \left(1 + \frac{B-4}{22} \right) C$

Variable

Description

where A = input value in \$/sq yd
 B = year being considered
 C = pavement area.

B, the year being considered, is reset to zero at each overlay.

Default: .01

REPLACE.SLABS.RIGIDPAVEMENT

The periodic cost of replacing rigid pavement slabs is estimated by this variable. The input value is in \$/sq yd/in. The yearly cost is determined within the program by the product of the input value, the total pavement thickness, the pavement area, and a yearly factor. The yearly factor is the percentage of slabs to be replaced in any given year. From past data,* the yearly factors are:

Year	4	6	8	10	12	14	16	18	20	22	24
Factor	.04	.13	.28	.31	.51	.99	1.16	1.41	1.21	.88	.41

Default: 2.0

OTHER.REPAIRS.RIGIDPAVEMENT

This variable provides the user with the capability of accounting for repairs other than those specifically listed. The cost estimate is input by the year in which the cost is incurred, followed by a lump sum dollar amount. Costs can be input for up to 10 years. Time is reset to zero at each overlay.

Default: 1 0.

OTHER.REPAIRS.FLEXIBLE.PAVEMENT

This variable is the same as the preceding variable, except that it considers flexible pavement repairs.

Default: 1 .0

CLEANING.SWEEPING.FLEXIBLE.PAVEMENT

This variable is an estimate of the cleaning and sweeping operation for flexible pavements. The input is in \$/sq yd of pavement. The cost is applied by the relationship: Cost = (pavement area)(input value)(year of the activity). The year of the activity is reset to zero at each overlay. Thus, the cost of this activity is a linear progression from the start of the design life to the time of the first overlay.

Default: .0

CLEANING.SWEEPING.RIGIDPAVEMENT

This is the same as the previous variable, except that the operation is for rigid pavements.

Default: .0

*Maintenance Cost Predictions for Airfield Pavements, Unpublished Report (CERL, 1974).

<i>Variable</i>	<i>Description</i>
	<i>Traffic Data</i>
VEHICLE.TYPE	A unique descriptive name of the type of vehicle for which the facility is being designed. This name must correspond with a matching set of data in the Vehicle Data Bank (see Appendix C). For airfield projects, this variable is the name of the aircraft (e.g., BOEING-707). For highway projects, this variable is designated as ROAD.LOAD. It can be alphanumeric with a maximum of 12 characters. Ten is the maximum number of vehicle types accepted in one run by the program. Note that blanks are not allowed in the vehicle name.
YEARLY.TRAFFIC	This variable must immediately follow the corresponding VEHICLE.TYPE card for airfield problems. It is the estimated number of aircraft passes per year—one value is listed for each year in the design life. The values may continue on a second card. ⁱ
DESIGN.INDEX.FLEXIBLE	This variable represents the traffic volume predicted for roadway flexible pavement design. It is given as a single value from 1 to 10 (see TM 5-822-5 for calculation). DIF and DIR must immediately follow the VEHICLE.TYPE ROAD.LOAD card.
DESIGN.INDEX.RIGID	Same as DIF except for roadway rigid pavement design (see TM 5-822-6 for its calculation).
PAST.TRAFFIC	A single numerical value estimating the traffic (passes for airfields and 18 kip EAL for roads) previously applied to the facility by a specific vehicle type. It must follow the corresponding vehicle type in the input. This variable indirectly indicates the present pavement condition. ^{e,i} Default: 0
LOAD.CATEGORY	This variable is the user's qualitative estimate of the traffic magnitude and is required only for airfield design. It is used to determine minimum thickness of surface and base course. (See Glossary [Appendix A] for a definition of the option.) Options: LIGHT MEDIUM HEAVY Default: LIGHT
WANDER	Specifies the traffic pattern on the facility being designed. The CHANNELIZED option should be used for roads. Options: CHANNELIZED UNCHANNELIZED Default: CHANNELIZED

*Variable**Description*

TRAFFIC.AREA

In airfield design, this variable specifies the design loading concentration.^b Four categories are defined: A, B, C, and D. The Glossary contains specifications for each traffic area. For further description, consult TM 5-824-3.

Options: A
B
C
D

CLASS.OF.ROAD

This variable defines the class of roads A through F, based on the design volume of traffic.^b Specifications for selecting the class of road are contained in TM 5-822-2.

Options: A
B
C
D
E
F

Notes:

- a. May be omitted.
- b. Must be part of the input.
- c. A default value is the value in the option code which is assumed by the program if that variable is not part of the input.
- d. Unnecessary when the calculation type is MAINTENANCE.
- e. Unnecessary when the calculation type is DESIGN.
- f. Necessary only if the READ option of RIGID.STRUCTURAL.ANALYSIS is chosen.
- g. If this option is selected, the input deck must include the appropriate fixed-form data card.
- h. Repeated for each VEHICLE.TYPE.

Fixed-Form Variable Descriptions

In the free-form input, the user is presented with three options which, if called, require additional data to complete the analysis. The three options are: FROST.DESIGN, EARTHWORK, and DRAINAGE.

Frost Design

Figure B5 is a layout sheet depicting the fixed format data card required when the CALCULATE option of FROST.DESIGN is called. Following is a description of each variable on the card:

<i>Card Columns</i>	<i>Variable</i>	<i>Description</i>
1-5	Frost Heading	The word FROST in columns 1-5 signifies to the program that frost data is available.
6		Blank.
7-12	Design Load	Enter Design Load (right-justified) in the six-column field (in pounds). Do not enter decimal point.
13	Configuration Code	Enter a single-digit numerical code in the range 1 to 8 to describe the Design Load Configuration. Codes are:

*Card
Columns*

Variable

Description

		1 = Single Wheel—100 sq in. (645 cm ²) contact area.
		2 = Twin Assembly Tricycle Gear, 20-in. (508-mm) spacing, 267 sq in. (1722 cm ²) in area for each wheel.
		3 = Twin Assembly Tricycle Gear, 37-in. (940-mm) spacing, 267 sq in. (1722 cm ²) contact area for each wheel.
		4 = Single Tandem Assembly Tricycle Gear, 60-in. (1524-mm) spacing, 400 sq in. (2580 cm ²) contact area for each wheel.
		5 = Twin Tandem Assembly Tricycle Gear, 31 X 63 in. (787 X 1600 mm) spacing, 267 sq in. (1722 cm ²) contact area for each wheel.
		6 = Twin Assembly Bicycle Gear, 37-in. (940-mm) spacing, 267 sq in. (1722 cm ²) contact area for each wheel.
		7 = Twin Assembly Bicycle Gear, 37- to 62-in. (940- to 1574-mm) spacing, 267 sq in. (1722 cm ²) contact area for each wheel.
		8 = Road Load.
14-15	Traffic Area Code	A single, right-justified, alphanumeric character. (For airfields the traffic area [A through E] and for roads, the design index [1 through 10], with 0 representing design index of 10).
16		Blank.
17-21	Design Freezing Index	Design Freezing Index entered right-justified (in degree days).*
22-24	Total Depth of Frost Penetration	Total Depth of Frost Penetration entered right-justified (in inches).*
25-30		Blank.
31	Minor	This field is used to indicate whether the pavement is of minor classification. See TM 5-818-2, p 6, Table 2. Code is: X = Minor Classification Blank = Not Minor Classification
32	Frost Group	Enter a single-digit Frost Group code in the range of 1 to 4 to describe the engineer's judgment of the subgrade composition with respect to frost design conditions. See TM 5-818-2 for definitions.

1 = F1

*The user must use either Design Freezing or Total Depth (not both).

Card Columns	Variable	Description												
		2 = F2												
		3 = F3												
		4 = F4												
33-34	Moisture	Enter the percentage of water content of the subgrade material (right-justified). The following moisture content ranges must be used for the respective dry weights:												
		<table><tr><td>$\gamma_d(\text{pcf})$</td><td>$m/c(\%)$</td></tr><tr><td>100</td><td>5-20</td></tr><tr><td>101-115</td><td>5-15</td></tr><tr><td>116-134</td><td>5-7</td></tr><tr><td>135</td><td>2-7</td></tr><tr><td>136-150</td><td>2-5</td></tr></table>	$\gamma_d(\text{pcf})$	$m/c(\%)$	100	5-20	101-115	5-15	116-134	5-7	135	2-7	136-150	2-5
$\gamma_d(\text{pcf})$	$m/c(\%)$													
100	5-20													
101-115	5-15													
116-134	5-7													
135	2-7													
136-150	2-5													
35-39	Horizontal Variability	Enter a single-digit numerical code in the range of 1 to 4 to indicate Horizontal Variability. Codes are:												
		1 = Uniform												
		2 = Slightly Variable												
		3 = Variable												
		4 = Extremely Variable												
41-42	Moisture Content	Enter the percentage of water content of the Base Course Material (right-justified).												
43-45	Dry Unit Weight	Enter the Dry Unit Weight of the Base Course Material. Value must be in the range of 100 to 150 pcf (pounds per cubic foot) (1602 to 2403 kg/m ³). See relationship given in description of moisture variable.												
46-47		Blank.												
48-80	Comments	Enter any comments which will appear on the report.												

Earthwork

Fixed format data cards are required if the PAVEMENT or the PAVEMENT.PLUS.APPROACH options are called for the variable EARTHWORK. Figure B6 illustrates the 11 card types used. The contents of each card are defined below.

<i>Card Type</i>	<i>Card Columns</i>	<i>Description</i>
A	1-2	TL—(Terrain Line) Identifies heading for end points of survey base line.
	3-10	Blank.
	11-20	North-south coordinate of base line starting point.
	21-30	East-west coordinate of base line starting point.
	31-40	North-south coordinate of base line end point.
	41-50	East-west coordinate of base line end point.
B	1-2	TD—(Terrain Data)* Identifying heading for the coordinates and elevations of original ground cross section. Limited to 100 cross sections with 20 points per cross section.
	3-10	Blank.
	11-20	Distance (in feet) along the base line (proceeding up-station) from the origin to the point of the cross section.
	21-30	Transverse distance from the base line to the cross section elevation point—(+) for right and (–) for left of base line.
	31-40	Elevation of the cross section point.
	41-50	Blank.
	51-60	Distance along base line for next cross section point.
	61-70	Transverse distance to next point.
C	71-80	Elevation of next point.
	1-3	TDR—(Terrain Data Read)* Identifying heading for determining cross section elevations directly from the survey data.
	4-10	Blank.
	11-20	Distance along base line to the point of the cross section.
	21-30	Transverse distance to cross section point.
	31-40	Height of the instrument.
	41-50	Rod reading at the point.

*This card is repeated as often as necessitated by the data.

<i>Card Type</i>	<i>Card Columns</i>	<i>Description</i>
D	1-7	PGLENDS—(Profile Grade Line End Points) Identifying heading for coordinates and elevations of the beginning and end of the pavement center line.
	8-10	Blank.
	11-20	North-south coordinate of the profile grade line starting point.
	21-30	East-west coordinate of the profile grade line starting point.
	31-40	Elevation of the starting point.
	41-50	Blank.
	51-60	North-south coordinate of the profile grade line end point.
	61-70	East-west coordinate of the profile grade line end point.
	71-80	Elevation of the end point.
E	1-6	PGLBRK—(Profile Grade Line Break Points)* Identifying heading for the distance to and elevation of break points (i.e., changes in slope) in the profile grade line. Limited to nine break points.
	7-10	Blank.
	11-20	Distance from the PGL starting point to the first break point.
	21-30	Elevation of the first break point.
	31-40	Distance to second break point.
	41-50	Elevation of second break point.
	51-60	Distance to third break point from starting point of PGL.
	61-70	Elevation of third break point.
F	71-80	Blank.
	1-3	TMP—(Template) Identifies heading for defining the width of earthwork used in calculations.
	4-10	Blank.
	11-20	Distance from PGL to left edge of section entered as a negative number.

*These data may be repeated up to three cards.

<i>Card Type</i>	<i>Card Columns</i>	<i>Description</i>
	21-23	0.0—a constant.
	24-30	Blank.
	31-40	Distance from PGL to right edge of section entered as a positive number.
	41-43	0.0—a constant.
	44-80	Blank.
G	1-4	ELIM—(Elevation Limits) Identifies heading which establishes limits on highest and lowest elevations to be considered in the calculations.
	5-10	Blank.
	11-20	Upper elevation limit established by specifying increment (in feet) above highest elevation point in the terrain data.
	21-30	Lower elevation limit established by specifying increment (in feet) below the lowest elevation point in the terrain data.
	31-80	Blank.
H	1-4	COST—Identifies card containing cost of cut and fill.
	5-10	Blank.
	11-20	Cost of excavation in \$/cubic yard.
	21-30	Cost of fill in-place in \$/cubic yard.
I	1-5	APRUN—(Approach Zone)* Identifies heading for the approach zone plan geometry.
	6-10	Blank.
	11	Approach zone number—1 through 9.
	12-20	Blank.
	21-30	Length of prism for volume calculations in the approach zone.
	31-40	Width of approach zone.
	41-80	Blank.

*This card may be repeated as necessary to account for changes in the glide slope or width of approach. Up to nine zones may be used.

<i>Card Type</i>	<i>Card Columns</i>	<i>Description</i>
J	1-5	APEND- (Approach Zone End Points)* Identifies heading for coordinates and elevations of the approach zone end points.
	6-10	Blank.
	11	Approach zone number (1 to 9) coinciding with number on card type H.
	12-20	Blank.
	21-30	North-south coordinates of the beginning of the approach zone section.
	31-40	East-west coordinates of the beginning of the approach zone section.
	41-50	Elevation of the beginning point.
	51-60	North-south coordinate of the end of the approach zone section.
	61-70	East-west coordinate of the end of the approach zone section.
	71-80	Elevation of the end point.
K	1-3	RUN--(Run Card) Identifies heading for commands regarding options. Must be last card of the Earthwork fixed-format data.
	4-10	Blank.
	11-20	Length (in feet) of prism to be used in the earthwork volume calculations.
	21	Extrapolation option code. When earthwork calculations exceed the furthest point in the original ground cross section, the program can be requested to extend the cross section by an extrapolation of the final two points in the section. Options: O--No extrapolation allowed. E--Extrapolation with message indicating where extrapolation occurred. X--Extrapolation without message.
	22	Mass diagram option code. Options: P--A plot of the mass diagram will be placed on tape OUT5. Block--No mass diagram plot is calculated.

*This card may be repeated as necessary to account for changes in the glide slope or width approach. Up to nine zones may be used.

<i>Card Type</i>	<i>Card Columns</i>	<i>Description</i>
	23-30	Blank.
	31-40	Distance from the starting point of PGL at which earthwork computations begin.
	41-50	Distance from the starting point of PGL at which earthwork computations end. Note: The length of the earthwork calculations must be less than or equal to the length of PGL.
	51-80	Blank.

Drainage

Figure B7 depicts the fixed-format input card which is required if the YES option of the variable DRAINAGE is chosen. Each item on the card is defined below. The geometry of the section required as input is shown in Figure B8.

<i>Card Columns</i>	<i>Description</i>
1-6	DRAINAGE—Identifies heading used to signify drainage data card.
7-10	Blank.
11-13	Depth to ground water table from the top of pavement (in inches). (Right-justified integer.) If larger than 999 in. (2515 mm), enter 999.
14-16	Blank.
17-20	The effective porosity of the base course material expressed as a decimal.
21-25	The drainage length (see Figure B8) expressed to the nearest tenth of a foot.
26-33	The permeability of the base course (in feet/min.). This value is expressed in E notation (e.g., $2.2 \times 10^{-5} = 2.2 \text{ E-5}$).
34-38	Vertical height of cross slope (see Figure B8) expressed as a decimal in inches.
39-43	Longitudinal length of drainage line (right-justified integer). The default value is the length of section from the free-form input.
44-48	The unit cost for trench excavation (in \$/cu yd) which may have two decimal places.
49-53	The in-place unit cost for filter material (\$/cu yd) which may have two decimal places.

*Card
Columns*

Description

54-58

The in-place unit cost of underdrain pipe (\$/lineal foot) which may have two decimal places.

59-63

The longitudinal slope of the pipe expressed as a four-place decimal. The minimum slope, which is also the default value, is 0.0015.

64-68

The Manning Roughness Factor expressed as a three-place decimal. Usual values are .013 for a smooth pipe and .024 for a corrugated pipe.

69

The number of sides to which the pipe outlets drain.

0—Outlets not considered.

1—All outlets drain to one side.

2—Outlets drain to both sides.

70-72

The average length of outlet pipe (in feet) as a right-justified integer. The default is 25 ft (7.5 m).

73-80

Blank.

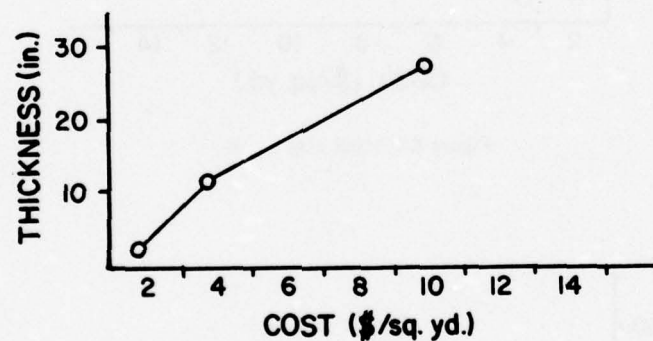


Figure B1. Construction material cost curve.

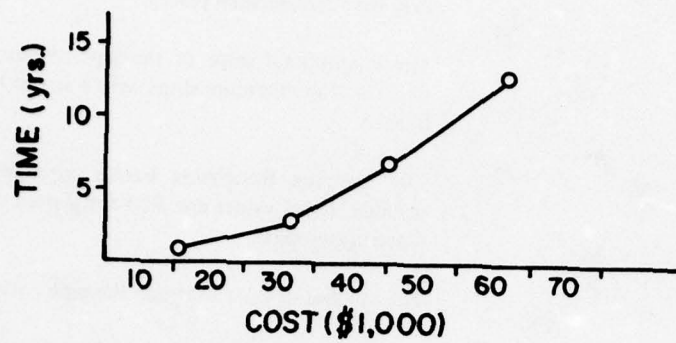


Figure B2. Vehicle maintenance cost curve.

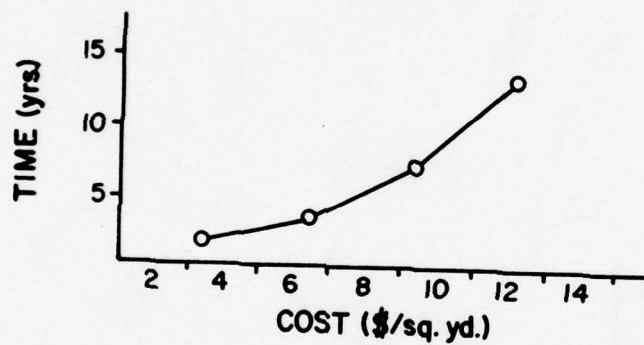


Figure B3. M&R cost curve.


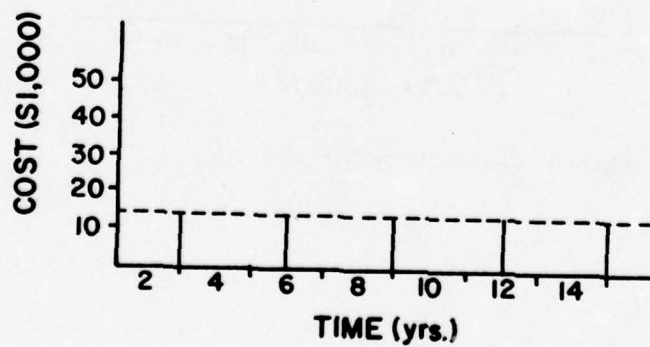


Figure B4. M&R periodic costs.

[illegible]

Figure B6. Typical examples of 11 types of fixed format input cards used with EARTHWORK.

80 COLUMN KEY PUNCH TRANSCRIPT LAYOUT SHEET										SHEET		OF		SHEETS		
DATE																
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51
52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68
69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85
86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102
103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119
120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136
137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153
154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170
171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187
188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204
205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221
222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238
239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255
256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272
273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289
290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306
307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323
324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340
341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357
358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374
375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391
392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408
409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425
426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442
443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476
477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493
494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510
511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527
528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544
545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561
562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578
579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595
596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612
613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629
630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646
647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663
664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680
681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697
698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714
715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731
732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748
749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765
766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782
783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799
800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816
817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833
834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850
851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867
868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884
885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901
902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918
919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935
936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952
953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969
970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986
987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003
1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020
1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037
1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054
1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071
1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088
1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105
1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122
1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139
1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156
1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173
1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190
1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207
1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224
1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241
1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258
1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275
1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292
1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309
1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326
1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343
1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360
1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377
1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394
1395	1396	139														

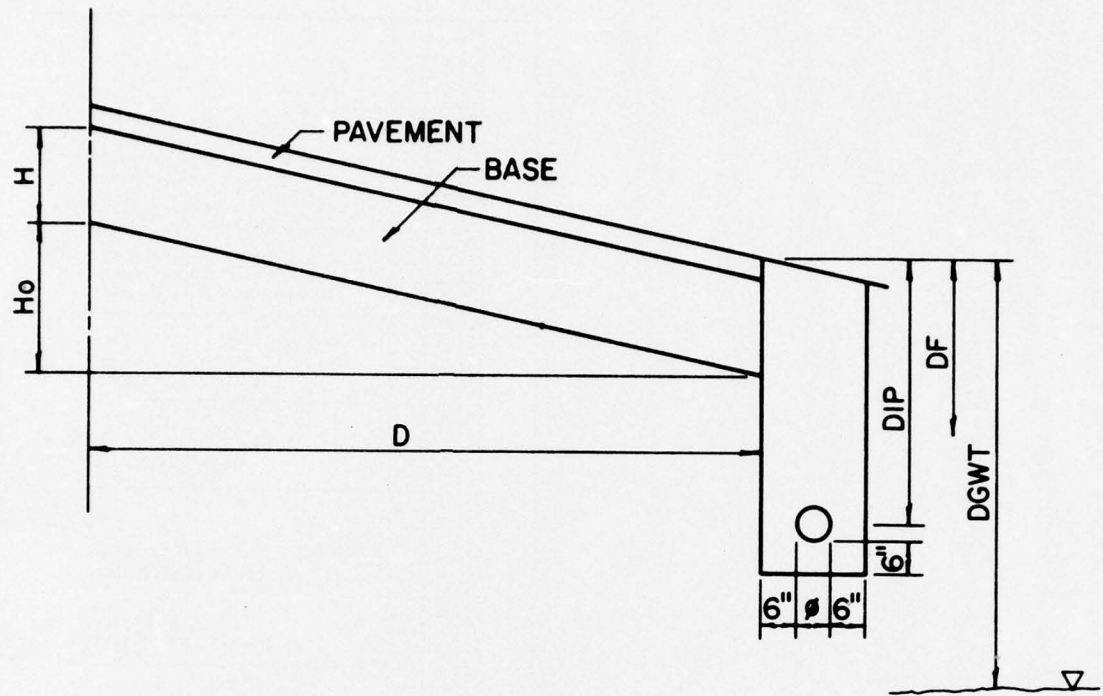

KEY: H_o = Height of cross-slope
 H = Thickness of base
 D = Drainage length
 ϕ = Diameter of pipe
 DIP = Depth to pipe
 $DGWT$ = Depth to ground water
 DF = Depth of frost penetration

Figure B8. Typical underdrainage cross section.

APPENDIX C: VEHICLE DATA BANK

Pavement design requires knowledge of the characteristics of vehicular traffic anticipated to use the facility. Most of the traffic data required in the LIFE2 analysis is innate to the type of vehicle for which the facility is designed and therefore is not subject to change. Thus, to decrease the user input requirements, vehicle characteristic information can be compiled in a data bank. This appendix describes the format and contents of the vehicle data bank used by the LIFE2 program. This data bank contains the necessary traffic information (except for volumes) for considering roadway pavements as well as airfield pavements. Procedures for updating information in the data bank and for adding other vehicles is provided in Volume II.

Data Format

Thirteen cards are necessary to code the information for each type of vehicle. The first eight cards pertain to rigid pavement design, while the last five pertain to flexible pavement design. The data bank uses a fixed format.

Items contained in each card and the required input format are described on pp 56, 57.*

Vehicle Data Bank Contents

The vehicle data bank presently used with the LIFE2 program contains information about 33 vehicles. This includes information for 32 aircraft and one set of data for road design. Vehicles contained in the data bank are:

Road-Load		
Heavy-Load	C-124C	
Medium-Load	C-130E	KC-97G
Light-Load	C-135A	KC-135A
Special-Load	C-140A	Boeing-707
B-47E	C-141A	Boeing-727
B-52	F-4E	Boeing-747
B-57B	F-104G	DC-8-10
C-7A	F-11A	DC-9-30
C-8A	A-7D	DC-10-10
C-54G	A-26A	Convair-880
C-123K	HC-130H	C-5A

Figure C3 is a computer printout of the vehicle data bank contents. The information, as shown, conforms to the format given in the *Data Format* section.

Use of the Data Bank

The vehicle data bank used with the LIFE2 program can be a multiple file (as presented in the *Vehicle Data Bank Contents* section) or a retained singular file for an individual project.

The multiple file would contain data about vehicles which could be required as design traffic. This file can be retained on a computer card deck, a magnetic tape, or a computer disc file. The entire file would then be called by LIFE2 and searched for the required vehicle types.

The singular file would be developed for a specific project. It would contain only the vehicles being considered as design traffic for a specific problem. The data (coded as in the *Data Format* section) should be placed on computer cards and input after the LIFE2 control cards.

*Although the descriptions sometimes use aircraft terminology, they are applicable to roadway vehicles. Data for C-5A aircraft, if used, should always appear as the last vehicle in the data bank, because of its unsymmetrical landing gear configuration. The complete vehicle data bank must be followed by a card having a dollar sign (\$) in column 1.

<i>Card Type</i>	<i>Item</i>	<i>Card Column</i>	<i>Input Format</i>	<i>Description</i>
A	1	1	A1	Dollar sign (\$) required to signify beginning of data for a particular vehicle.
	2	2-13	A12	VEHICLE.TYPE
	3	31-40	A9	RIGID
		41-49		Blank
	4	50-59	F10.5	Pass/coverage ratio for channelized traffic.
	5	60-69	F10.5	Pass/coverage ratio for unchannelized traffic.
	6	77-78	I2	Designates type of gear: 01 for tricycle; 02 for bicycle. Specify 01 for road design.
	7	79-80	I2	Designates wheel type: 02 for twin-tandem; 00 for all others (including Road Load).
B	1	1-50	A50	VEHICLE.TYPE
C	1	1-10	F10.0	Weight/gear for airfields and weight/axle for roads (lb).
	2	20-30	F10.0	Wheel contact area (sq in.).
	3	31-40	F5.0	Number of gammas (set equal to 1; i.e., only one gear location will be considered in LIFE2—see Figure C1).
D	1	1-10	F10.0	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">a</div> <div style="font-size: 3em; line-height: 1;">}</div> <div style="margin-left: 10px;">Gear spacing parameters—see Figure C2.</div> </div>
	2	11-20	F10.0	
	3	21-30	F10.0	
	4	31-40	F10.0	
	5	41-50	F10.0	Number of deltas (set equal to 1; i.e., only one gear location will be considered in LIFE2—see Figure C1).
	6	51-60	F10.0	Number of σ -G pairs; i.e., extra pairs of pavement stress and the correlative gear load to be considered (set equal to 0).
E	1	1-10	F10.0	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">n_a</div> <div style="font-size: 3em; line-height: 1;">}</div> <div style="margin-left: 10px;">Gear spacing parameters—see Figure C2.</div> </div>
	2	11-20	F10.0	
	3	21-30	F10.0	
	4	31-40	F10.0	

<i>Card Type</i>	<i>Item</i>	<i>Card Column</i>	<i>Input Format</i>	<i>Description</i>	
	5	41-50	F10.0	ϕ_e	The tire print width/tire print length. (Default value is 1.667 if not entered.)
F	1	1-10	F1-10	Beta. This parameter provides control for determining the number of points used to determine the shape of the tire print perimeter. (Set equal to 75.)	
G	1	1-10	F10.0	Gamma. A gear location parameter—see Figure C1.	
H	1	1-10	F10.0	Delta. A gear location parameter—see Figure C1.	
I				Duplicate of card type A, except FLEXIBLE replaces RIGID in columns 31-40.*	
J	1-7	1-70	7E10.0	Equivalent single-wheel loads for seven pavement thicknesses.**	
K	1-7	1-70	7E10.0	Equivalent single-wheel loads for seven pavement thicknesses.	
L	1-6	1-60	6E10.0	Equivalent single-wheel loads for six pavement thicknesses.	
M	1	1-10	F10.0	Tire contact area for one wheel (sq in.).	
	2	11-20	F10.0	Number of wheels used to compute equivalent single-wheel loads.	

*For twin-tandem wheels, the pass-to-coverage ratio for flexible pavements is one-half that of rigid pavements; however, in coding these data, the rigid value is used on both Card A and Card I, and the reduction is performed in the program.

**Card types J, K, and L contain the relationship of ESWL to pavement thickness. The thicknesses used in airfield design are: 1, 2, 3, 4, 5, 10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100, 120, 140, and 150. For road design, the thicknesses are: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 16, 18, 20, 22, 24, 28, 32, and 36.

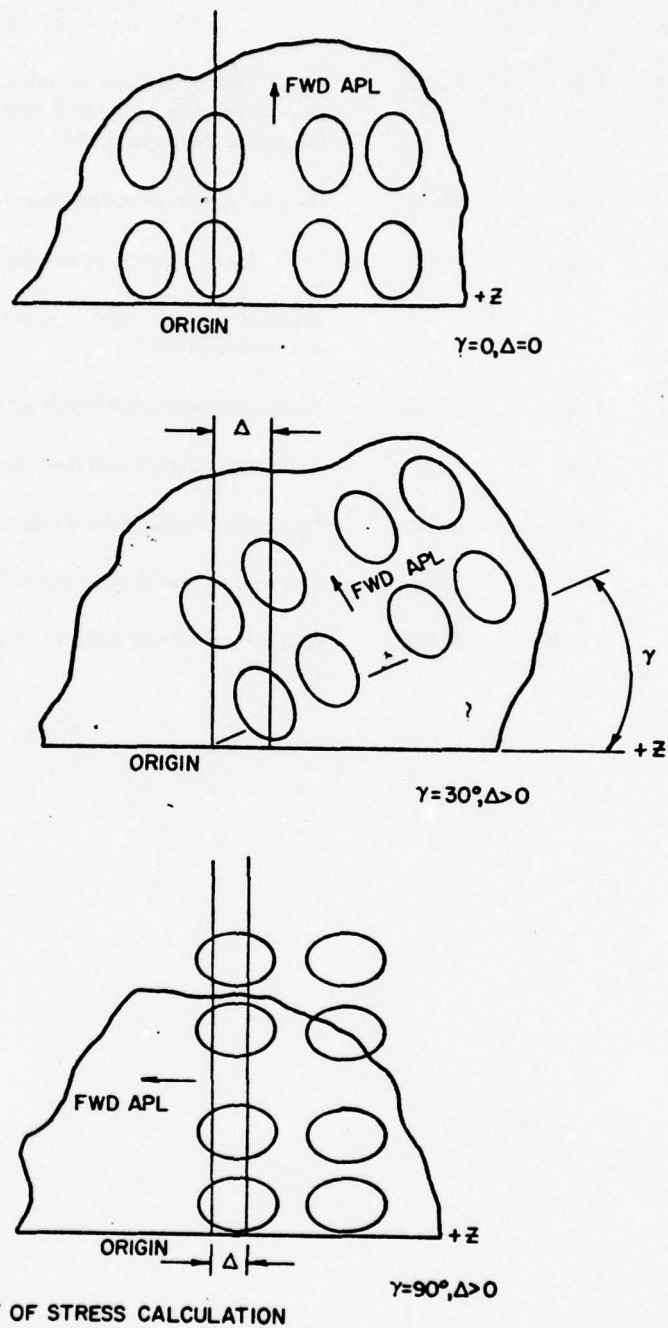



Figure C1. Description of gamma delta parameters. (From W. C. Kreger, *Computerized Aircraft Ground Flotation Analysis—Edge-Loaded Rigid Pavements*, Report ERR-FW-572 [General Dynamics Corp., 1976].)

SINGLE WHEEL




$a=0$ $n_a=1$
 $b=0$ $n_b=1$
 $c=0$ $n_c=1$
 $d=0$ $n_d=1$

TWIN




a shown $n_a=2$
 $b=0$ $n_b=1$
 $c=0$ $n_c=1$
 $d=0$ $n_d=1$

DUAL TWIN




a shown $n_a=2$
 b shown $n_b=2$
 $c=0$ $n_c=1$
 $d=0$ $n_d=1$

TWIN TANDEM




a shown $n_a=2$
 $b=0$ $n_b=1$
 c shown $n_c=2$
 $d=0$ $n_d=1$

DUAL TWIN TANDEM



a shown $n_a=2$
 b shown $n_b=2$
 c shown $n_c=1$
 $d=0$ $n_d=1$

TRIPLE TWIN TANDEM



a shown $n_a=2$
 $b=0$ $n_b=1$
 c shown $n_c=3$
 $d=0$ $n_d=1$

Figure C2. Wheel configuration spacing parameters. (From W. C. Kreger, *Computerized Aircraft Ground Flotation Analysis—Edge-Loaded Rigid Pavements*, Report ERR-FW-572 [General Dynamics Corp., 1967].)

VEHICLE DATA BANK AS OF 01 JANUARY 1978									
ROAD-LOAD			RIGID		1.0	1.0	0100		
ROAD-LOAD									
30000.		54.0	1.0						
58.5	13.5	0.0	0.0	1.0	0.0				
2.0	2.0	1.0	1.0						
75.									
90.0									
0.0									
ROAD-LOAD			FLEXIBLE		1.0	1.0	0100		
5303.E0	5363.E0	5462.E0	5572.E0	5746.E0	5916.E0	6112.E0			
6317.E0	6534.E0	6761.E0	7679.E0	8159.E0	8427.E0	8582.E0			
8761.E0	8846.E0	8993.E0	8922.E0	8941.E0	8954.E0				
64.29	2.								
HEAVY-LOAD			RIGID		1.68	2.0	0200		
HEAVY-LOAD									
265000.0		267.0	1.0						
62.0	37.0	0.0	0.0	1.0	0.0				
2.0	2.0	1.0	1.0						
75.									
90.0									
0.0									
HEAVY-LOAD			FLEXIBLE		1.68	2.0	0200		
94987.E0	95229.E0	95786.E0	96544.E0	97486.E0	104290.E0	113290.E0			
123367.E0	133860.E0	145083.E0	165064.E0	182058.E0	197340.E0	211688.E0			
225069.E0	236172.E0	245321.E0	259217.E0	269982.E0	272777.E0				
267.	4.								
MEDIUM-LOAD			RIGID		3.14	5.62	0100		
MEDIUM-LOAD									
100000.		267.	1.						
37.	0.	0.	0.	1.	0.				
2.	1.	1.	1.						
75.									
90.									
0.									
MEDIUM-LOAD			FLEXIBLE		3.14	5.62	0100		
112405.E0	112638.E0	113019.E0	113538.E0	114185.E0	119887.E0	125143.E0			
132721.E0	142152.E0	151397.E0	167344.E0	176988.E0	183024.E0	186997.E0			
189727.E0	191674.E0	193105.E0	195022.E0	196207.E0	196636.E0				
267.	2.								
LIGHT-LOAD			RIGID		8.58	17.0	0100		
LIGHT-LOAD									
25000.		100.	1.						
0.	0.	0.	0.	1.	0.				
1.	1.	1.	1.						
75.									
90.									
0.									
LIGHT-LOAD			FLEXIBLE		8.58	17.0	0100		
25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0
25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0
25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0	25000.E0
100.	1.								
SPECIAL-LOAD			RIGID		4.92	9.80	0100		
SPECIAL-LOAD									
53000.		241.	1.						

Figure C3. Vehicle data bank contents—September 1977.

0.	0.	0.	0.	1.		
1.	1.	1.	1.			
75.						
90.						
0.						
\$SPECIAL-LOAD			FLEXIBLE	4.92	9.80	0100
53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0
53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0
53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0
241.	1.					
\$B-47E			RIGID	1.57	2.81	0200
B-47E						
129000.		280.	1.			
37.	0.	0.	0.	1.	0.	
2.	1.	1.	1.			
75.						
90.						
0.						
\$B-47E			FLEXIBLE	1.57	2.81	0200
36391.E0	36435.E0	36556.E0	36720.E0	36925.E0	38424.E0	40429.E0
43023.E0	45889.E0	48889.E0	53940.E0	57006.E0	58950.E0	60239.E0
61110.E0	61767.E0	62238.E0	62469.E0	63261.E0	63403.E0	
240.	2.					
\$B-52			RIGID	1.68	2.0	0200
B-52						
265000.0		267.0	1.0			
62.0	37.0	0.0	0.0	1.0	0.0	
2.0	2.0	1.0	1.0			
75.						
90.0						
0.0						
\$B-52			FLEXIBLE	1.68	2.0	0200
94887.E0	95228.E0	95786.E0	96544.E0	97486.E0	104290.E0	113290.E0
123267.E0	133860.E0	145043.E0	165064.E0	182058.E0	197360.E0	211688.E0
225069.E0	236172.E0	245321.E0	259217.E0	268982.E0	272777.E0	
267.	4.					
\$B-57B			RIGID	6.47	12.83	0100
B-57B						
27500.		182.	1.			
0.	0.	0.	0.	1.		
1.	1.	1.	1.			
75.						
90.						
0.						
\$B-57B			FLEXIBLE	6.47	12.83	0100
27500.E0	27500.E0	27500.E0	27500.E0	27500.E0	27500.E0	27500.E0
27500.E0	27500.E0	27500.E0	27500.E0	27500.E0	27500.E0	27500.E0
27500.E0	27500.E0	27500.E0	27500.E0	27500.E0	27500.E0	27500.E0
182.	1.					
\$C-7A			RIGID	2.78	5.42	0100
C-7A						
12500.		152.	1.			
20.	0.	0.	0.	1.		
2.	1.	1.	1.			
75.						
90.						
0.						
\$C-7A			FLEXIBLE	2.78	5.42	0100
7154.F0	7191.F0	7251.F0	7331.E0	7429.E0	8200.E0	9191.E0
10077.E0	10648.E0	11073.E0	11459.E0	11689.E0	11817.E0	11899.E0
11954.E0	11992.E0	12020.E0	12056.E0	12078.E0	12086.E0	
152.	2.					

Figure C3 (cont'd).

\$C-RA			RIGID	7.16	6.10	0100
17500.	C-RA	218.	1.			
23.	0.	0.	0.	1.		
2.	1.	1.	1.			
75.						
90.						
0.						
\$C-RA			FLEXIBLE	7.16	6.10	0100
9822.E0	9840.E0	9921.E0	10001.E0	10106.E0	10945.E0	12051.E0
13237.E0	14094.E0	14653.E0	15392.E0	155775.E0	16000.E0	16143.E0
16238.E0	16305.E0	16354.E0	16418.E0	16457.E0	16471.E0	
218.	2.					
\$C-54G			RIGID	3.05	5.75	0100
38500.	C-54G	250.	1.			
29.	0.	0.	0.	1.		
2.	1.	1.	1.			
75.						
90.						
0.						
\$C-54G			FLEXIBLE	3.05	5.75	0100
22244.E0	22326.E0	22427.E0	22564.E0	22734.E0	23965.E0	25887.E0
27997.E0	30261.E0	32045.E0	34325.E0	35623.E0	36413.E0	36924.E0
37270.E0	37515.E0	37694.E0	37932.E0	38079.E0	38131.E0	
250.	2.					
\$C-123K			RIGID	5.23	10.38	0100
25300.	C-123K	275.	1.			
0.	0.	0.	0.	1.		
1.	1.	1.	1.			
75.						
90.						
0.						
\$C-123K			FLEXIBLE	5.23	10.38	0100
25300.E0	25300.E0	25300.E0	25300.E0	25300.E0	25300.E0	25300.E0
25300.E0	25300.E0	25300.E0	25300.E0	25300.E0	25300.E0	25300.E0
25300.E0	25300.E0	25300.E0	25300.E0	25300.E0	25300.E0	25300.E0
275.	1.					
\$C-124C			RIGID	2.19	3.77	0100
50500.	C-124C	640.	1.			
44.	0.	0.	0.	1.		
2.	1.	1.	1.			
75.						
90.						
0.						
\$C-124C			FLEXIBLE	2.19	3.77	0100
58302.E0	58360.E0	58459.E0	58592.E0	58784.E0	60373.E0	62846.E0
65792.E0	69176.E0	72841.E0	79795.E0	84732.E0	88218.E0	90717.E0
92543.E0	93905.E0	94942.E0	96381.E0	97301.E0	97640.E0	
640.	2.					
\$C-130E			RIGID	4.36	8.72	0100
83700.	C-130E	440.	1.			
0.	0.	60.	0.	1.	0.	
1.	1.	2.	1.			
75.						
90.						
0.						
\$C-130E			FLEXIBLE	4.36	8.72	0100

Figure C3 (cont'd).

45921.E0	45967.E0	46042.E0	46146.E0	46276.E0	47259.E0	48637.E0
50257.E0	52027.E0	54086.E0	58576.E0	63417.E0	67974.E0	71282.E0
73693.E0	75486.E0	76847.E0	78728.E0	79927.E0	80368.E0	
440.	2.					
SC-135A			RIGID		3.36	6.06
	C-135A					0100
131900.		230.	1.			
36.	0.	60.	0.	1.		
2.	1.	2.	1.			
75.						
90.						
0.						
SC-135A			FLEXIBLE		3.36	6.06
131900.E0	131900.E0	131900.E0	131900.E0	131900.E0	131900.E0	131900.E0
131900.E0	131900.E0	131900.E0	131900.E0	131900.E0	131900.E0	131900.E0
131900.E0	131900.E0	131900.E0	131900.E0	131900.E0	131900.E0	131900.E0
230.	1.					
SC-140A			RIGID		6.85	12.89
	C-140A					0100
17500.		43.	1.			
14.5	0.	0.	0.	1.		
2.	1.	1.	1.			
75.						
90.						
0.						
SC-140A			FLEXIBLE		6.85	12.89
9995.E0	10119.E0	10307.E0	10543.E0	10814.E0	12657.E0	14585.E0
15683.E0	16299.E0	16670.E0	17069.E0	17265.E0	17375.E0	17442.E0
17486.E0	17517.E0	17539.E0	17568.E0	17585.E0	17591.E0	
43.	2.					
SC-141A			RIGID		3.44	6.38
	C-141A					0102
14900.		208.	1.			
32.5	0.	48.	0.	1.	0.	
2.	1.	2.	1.			
75.						
90.						
0.						
SC-141A			FLEXIBLE		3.44	6.38
47977.E0	48222.E0	48620.E0	49153.E0	49821.E0	54507.E0	60850.E0
68411.E0	77296.E0	86174.E0	101875.E0	113752.E0	122058.E0	127953.E0
132227.E0	135395.E0	137793.E0	141100.E0	143202.E0	143974.E0	
208.	4.					
SF-4E			RIGID		8.58	17.
	F-4E					0100
27000.		102.	1.			
0.	0.	0.	0.	1.	0.	
1.	1.	1.	1.			
75.						
90.						
0.						
SF-4E			FLEXIBLE		8.58	17.
27000.E0	27000.E0	27000.E0	27000.E0	27000.E0	27000.E0	27000.E0
27000.E0	27000.E0	27000.E0	27000.E0	27000.E0	27000.E0	27000.E0
27000.E0	27000.E0	27000.E0	27000.E0	27000.E0	27000.E0	27000.E0
102.	1.					
SF-104G			RIGID		11.10	22.0
	F-104G					0100
13500.		63.	1.			
0.	0.	0.	0.	1.		
1.	1.	1.	1.			

Figure C3 (cont'd).

75.							
90.							
0.							
\$F-104G			FLEXIBLE		11.10	22.0	0100
13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	
13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	
13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	13500.E0	
63.	1.						
\$F-111A			RIGID		4.92	9.80	0100
	F-111A						
53000.		241.	1.				
0.	0.	0.	0.	1.			
1.	1.	1.	1.				
75.							
90.							
0.							
\$F-111A			FLEXIBLE		4.92	9.80	0100
53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	
53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	
53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	53000.E0	
241.	1.						
\$A-7D			RIGID		11.10	22.0	0100
	A-7D						
17500.		62.	1.				
0.	0.	0.	0.	1.			
1.	1.	1.	1.				
75.							
90.							
0.							
\$A-7D			FLEXIBLE		11.10	22.0	0100
17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	
17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	
17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	17500.E0	
62.	1.						
\$A-26A			RIGID		5.37	10.70	0100
	A-26A						
18500.		262.	1.				
0.	0.	0.	0.	1.			
1.	1.	1.	1.				
75.							
90.							
0.							
\$A-26A			FLEXIBLE		5.37	10.70	0100
18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	
18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	
18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	18500.E0	
262.	1.						
\$HC-130H			RIGID		4.58	9.14	0100
	HC-130H						
83700.		364.	1.				
0.	0.	60.	0.	1.			
1.	1.	2.	1.				
75.							
90.							
0.							
\$HC-130H			FLEXIBLE		4.58	9.14	0100
83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	
83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	
83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	83700.E0	
364.	1.						
\$KC-97G			RIGID		3.41	6.11	0100

Figure C3 (cont'd).

KC-97G									
AA000.		247.	1.						
37.5	0.	0.	0.	1.					
2.	1.	1.	1.						
75.									
90.									
0.									
\$KC-97G			FLEXIBLE		3.41	6.11			0100
49750.E0	49887.E0	50062.E0	50370.E0	50595.E0	52725.E0	55568.E0			
59261.E0	63099.E0	67208.E0	73945.E0	72154.E0	80879.E0	82711.E0			
83991.E0	84915.E0	85600.E0	86525.E0	87102.E0	87312.E0				
247.	2.								
KC-135A									
\$KC-135A			RIGID		3.36	6.06			0102
142000.	KC-135A	230.	1.						
36.	0.	60.	0.	1.	0.				
2.	1.	2.	1.						
75.									
0.									
-1.									
\$KC-135A			FLEXIBLE		3.36	6.06			0102
44339.E0	44529.E0	44838.E0	45256.E0	45773.E0	49435.E0	54189.E0			
60129.E0	66660.E0	73772.E0	86740.E0	98094.E0	107520.E0	114452.E0			
119626.E0	123526.E0	126520.E0	130708.E0	133406.E0	134403.E0				
230.	4.								
BOEING-707									
\$BOEING-707			RIGID		3.24	6.0			0102
120564.0	BOEING-707	177.3	1.0						
34.0	0.0	56.0	0.0	1.0	0.0				
2.0	2.0	2.0	1.0						
75.									
90.									
0.0									
\$BOEING-707			FLEXIBLE		3.24	6.0			0102
177.3	4.								
37177.E0	37363.E0	37662.E0	38064.E0	38556.E0	41963.E0	46283.E0			
51494.E0	57209.E0	63809.E0	75645.E0	85872.E0	93693.E0	99347.E0			
103511.E0	106628.E0	109005.E0	112305.E0	114416.E0	115194.E0				
177.3	4.								
BOEING-727									
\$BOEING-727			RIGID		3.25	6.00			0100
80000.	BOEING-727	237.	1.						
34.	0.	0.	0.	1.					
2.	2.	1.	1.	1.					
75.									
90.									
0.									
\$BOEING-727			FLEXIBLE		3.25	6.00			0100
45029.E0	45136.E0	45312.E0	45551.E0	45847.E0	47979.E0	50970.E0			
54561.E0	58425.E0	62537.E0	68447.E0	71891.E0	74016.E0	75349.E0			
76343.E0	77012.E0	77503.E0	78157.E0	78561.E0	78704.E0				
237.	2.								
BOEING-747									
\$BOEING-747			RIGID		3.70	5.16			0102
338000.	BOEING-747	207.5	1.0						
106.0	44.0	58.0	0.0	1.0	0.0				
2.0	2.0	2.0	1.0						
75.									
90.									
0.0									
\$BOEING-747			FLEXIBLE		3.70	5.16			0102
63166.E0	63632.E0	64388.E0	65407.E0	66457.E0	75379.E0	86460.E0			

Figure C3 (cont'd).

98698.E0	111930.E0	126165.E0	155234.E0	183357.E0	209052.E0	232337.E0	
253757.E0	273810.E0	292886.E0	322316.E0	360004.E0	374702.E0		
207.5	16.						
\$DC-8-10			RIGID	3.14	5.92		0102
DC-8-10							
132150.		228.	1.				
30.	0.	55.	0.				
2.	1.	2.	1.				
75.							
90.							
0.							
\$DC-8-10			FLEXIBLE	3.14	5.92		0102
43767.E0	43978.E0	44321.E0	44747.E0	45362.E0	49464.E0	54999.E0	
61880.E0	69530.E0	76692.E0	88847.E0	99254.E0	106903.E0	112566.E0	
116817.E0	120056.E0	122563.E0	126103.E0	128408.E0	129265.E0		
228.	4.						
\$DC-9-30			RIGID	3.58	6.90		0100
DC-9-30							
51300.		165.	1.				
26.	0.	0.	0.	1.			
2.	1.	1.	1.				
75.							
90.							
0.							
\$DC-9-30			FLEXIBLE	3.58	6.90		0100
30655.E0	30770.E0	30956.E0	31206.E0	31513.E0	33740.E0	36734.E0	
40205.E0	43566.E0	45947.E0	48836.E0	50406.E0	51335.E0	51924.E0	
52319.E0	52596.E0	52797.E0	53063.E0	53225.E0	53283.E0		
165.	2.						
\$DC-10-10			RIGID	3.64	5.80		0102
DC-10-10							
204250.		295.	1.				
54.	0.	64.	0.	1.			
2.	1.	2.	1.				
75.							
90.							
0.							
\$DC-10-10			FLEXIBLE	3.64	5.80		0102
62524.E0	62709.E0	63011.E0	63423.E0	63935.E0	67660.E0	72634.E0	
78317.E0	84675.E0	92289.E0	104432.E0	126379.E0	141415.E0	153054.E0	
162050.E0	169046.E0	174540.E0	182412.E0	187605.E0	189549.E0		
295.	4.						
\$CONVAIR-880			RIGID	3.68	7.16		0100
CONVAIR-880							
87400.		122.	1.				
21.5	0.	45.	0.	1.			
2.	1.	2.	1.				
75.							
90.							
0.							
\$CONVAIR-880			FLEXIBLE	3.68	7.16		0100
28142.E0	28385.E0	28773.E0	29289.E0	29910.E0	34038.E0	39873.E0	
45877.E0	51408.E0	56064.E0	64606.E0	78944.E0	75206.E0	78084.E0	
80110.E0	81579.E0	82673.E0	84156.E0	85083.E0	85420.E0		
122.	4.						
\$C-54			RIGID	1.62	2.18		0102
C-54							
181200.		285.	1.				
0.	0.	0.	0.	1.	0.		
0.	0.	0.	0.	0.	0.		
60.5	32.5	26.5	32.5	-26.5	32.5	-60.5	32.5
-24.0	-32.5				24.0	-32.5	
75.	0.	0.	0.	0.			
90.							
0.							
\$C-54			FLEXIBLE	1.62	2.18		0102
42840.E0	43074.E0	43426.E0	43905.E0	44501.E0	48834.E0	54594.E0	
61062.E0	67823.E0	74623.E0	88184.E0	101770.E0	114416.E0	124822.E0	
133424.E0	140424.E0	146120.E0	154662.E0	160557.E0	162824.E0		
285.	6.						

Figure C3 (cont'd).

APPENDIX D: LIFE2 INPUT WORKSHEET

A LIFE2 input worksheet has been developed to facilitate program input preparation. This worksheet appears on the following pages and has been designed for local reproduction. It contains a listing of all program variables arranged categorically as per Appendix B. Instructions to the designer and to the keypuncher are also provided on the worksheet.

LIFE2 PROGRAM INPUT

Project:	Section:
Date:	Trial No.:
Designer:	
<p><i>Instructions</i></p> <p>Designer: Fill in input value or option desired for each variable to be used in the analysis in accordance with the LIFE2 User Manual. Strike out variables which are not required or for which the default value is desired.</p> <p>Keypuncher: This data is in free format. Columns 73-80 are not to be used. Do not leave more than 9 blanks at the beginning of a card or between any entries on a card. Dollar signs (\$) may never be used. The italicized headings should not be coded and blank cards should not be included.</p>	
<i>General Information</i>	
<i>Variable</i>	<i>Input or Option</i>
NAME.OF.BASE	
LOCATION.OF.BASE	
IDENTIFICATION.NUMBER	
GENERAL.DESCRPTION	
<i>Design Data</i>	
<i>Variable</i>	<i>Input or Option</i>
CALCULATION.TYPE	
DESIGN.LIFE	
LENGTH.OF.SECTION	
WIDTH.OF.SECTION	
RIGID.STRUCTURAL.ANALYSIS	
DESIGN.RESTRICTION	
RANGE.OF.THICKNESS	

<i>Variable</i>	<i>Input or Option</i>
TIMES	
BASE.TRADEOFF	
FROST.DESIGN	
DRAINAGE	
EARTHWORK	
CLIMATE	
GENERATE.MATERIAL.COMBINATIONS	
NUMBER.OF.SUBBASE.SCHEMES	
SUBBASE.TYPES	
SCHEME 1	
SCHEME 2	
SCHEME 3	
SCHEME 4	
OVERLAY.RESTRICTION	
MINIMUM.THICKNESS.FLEXIBLE.OVERLAY	
MINIMUM.THICKNESS.RIGID.OVERLAY	
TIMES.OF.OVERLAYS	
STRATEGY 1	
STRATEGY 2	
STRATEGY 3	
STRATEGY 4	
STRATEGY 5	
STRATEGY 6	
BONDING	
DTYPE	
DTHICKNESS	
INITIAL.FAILURE	
CONDITION	
FLEXIBLE.PAVEMENT.MATERIAL.PROPERTIES	
SUBGRADE	
COMPACTED	
SUBBASE	
BASE	

<i>Variable</i>	<i>Input or Option</i>
SUBGRADE.COHESSION.INDEX	
SUBGRADE.CBR	
SUBGRADE.DENSITY	
SUBGRADE.MODULUS	
GRANULAR.BASE.MATERIAL	
CONCRETE.FLEXURAL.STRENGTH	
<i>Cost Data</i>	
<i>Variable</i>	<i>Input or Option</i>
COMPACTED.SUBGRADE	
FLEXIBLE.PAVEMENT.BASE	
SUBBASE	
RIGID.PAVEMENT.BASE	
FLEXIBLE.PAVEMENT	
FLEXIBLE.OVERLAY	
RIGID.OVERLAY.PARTIAL.BOND	
RIGID.OVERLAY.UNBONDED	
DELAY.COST.FLEXIBLE.OVERLAY	
DELAY.COST.RIGID.OVERLAY	
DISCOUNT	
ESCALATION.RATE	
GEOGRAPHIC.FACTOR	
VEHICLE.MAINTENANCE	
ROUTINE.MAINTENANCE RIGID.INITIAL.CONSTRUCTION	
ROUTINE.MAINTENANCE RIGID.OVERLAY.SYSTEM	
ROUTINE.MAINTENANCE FLEXIBLE.INITIAL.CONSTRUCTION	
ROUTINE.MAINTENANCE FLEXIBLE.OVERLAY.SYSTEM	
MAINTENANCE.COST.ANALYSIS	
MAINTAIN.DRAINS	
SEAL.JOINTS.CRACKS.RIGIDPAVEMENT	
CRACKSEALING.FLEXIBLE.PAVEMENT	
CLEANING.SWEEPING.RIGIDPAVEMENT	

Variable		Input or Option
CLEANING.SWEEPING.FLEXIBLE.PAVEMENT		
PATCHING.FLEXIBLE.PAVEMENT		
REPLACE.SLABS.RIGIDPAVEMENT		
SURFACE.TREATMENT.FLEXIBLE.PAVEMENT		
REPAIR.SCALING.POPOUTS.RIGIDPAVEMENT		
OTHER.MAINTENANCE.RIGIDPAVEMENT		
OTHER.MAINTENANCE.FLEXIBLE.PAVEMENT		
OTHER.REPAIRS.RIGIDPAVEMENT		
OTHER.REPAIRS.FLEXIBLE.PAVEMENT		
<i>Traffic Data</i>		
Variable		Input or Option
For road design	VEHICLE.TYPE	
	DESIGN.INDEX	
	CLASS.OF.ROAD	
For airfield design	VEHICLE.TYPE	
	YEARLY.TRAFFIC	
	PAST.TRAFFIC	
	CONCRETE.STRESSES.OVER.ASPHALT	
	CONCRETE.STRESSES.ON.GRADE	
	VEHICLE.TYPE	
	YEARLY.TRAFFIC	
	PAST.TRAFFIC	
	CONCRETE.STRESSES.OVER.ASPHALT	
	CONCRETE.STRESSES.ON.GRADE	
	LOAD.CATEGORY	
	WANDER	
	TRAFFIC.AREA	
END OF INFORMATION		

APPENDIX E: LIFE2 EXAMPLE PROBLEM

This appendix provides a life-cycle design analysis for an airfield runway to exemplify use of the LIFE2 program. The program input is described followed by an explanation of the output.

Input

NAME.OF.BASE " "

(The user may insert the name of the base or area in which the project is to be constructed. The name must be enclosed in quotes.)

LOCATION.OF.BASE " "

(The user may insert the location of the project in quotes.)

IDENTIFICATION.NUMBER "EXAMPLE PROBLEM"

(The user may insert an agency or organizational identification number [in quotes] for this project.)

GENERAL.DESCRPTION "AIRFIELD RUNWAY LIFE-CYCLE DESIGN"

(The user may insert a general description of the project [in quotes].)

CALCULATION.TYPE LIFE-CYCLE

DESIGN.LIFE 25

LENGTH.OF.SECTION 90

WIDTH.OF.SECTION 90

FROST.DESIGN READ 30

(The READ option bypasses the frost design analysis and can be used when depth of frost penetration is known for the project site. The 30 in the example is the depth in inches which will be used in the program as a constraint for complete protection against frost penetrating the subgrade.)

EARTHWORK PAVEMENT

(The PAVEMENT option indicates that the program will calculate the earthwork quantities and costs for the paved area. This option requires an additional set of data on fixed format cards which appear later in the input deck.)

DRAINAGE YES

(YES specifies that the analysis will consider whether underdrains are necessary. This option requires an additional set of data on fixed format cards which appear later in the input deck.)

RIGID.STRUCTURAL.ANALYSIS READ

(This indicates that CSOG and CSOA are known and will be included as input. The stresses are input with the associated VEHICLE.TYPE.)

RANGE.OF.THICKNESS 15 35

(This is the user's estimate of the range of thickness of rigid pavement for which the structural analysis data [CSOA and CSOG] may be required in the problem.)

DESIGN.RESTRICTION NONE

(Both rigid and flexible design schemes are to be considered.)

BASE.TRADEOFF TRADEOFF

(This indicates that a tradeoff between base thickness and rigid slab thickness is to be executed.)

GRANULAR.BASE.MATERIAL NATURAL.SAND.AND.GRAVEL

(In performing the TRADEOFF, a revised subgrade modulus will be determined for each base thickness the program considers. The revised value is derived from data appropriate to a base material that is categorized as NATURAL.SAND.AND.GRAVEL.)

CONDITION SHATTERED.SLAB

(The calculation of overlays for rigid pavement designs generated in this run assumes that the structural condition at the time of the overlay can be classified as SHATTERED.SLAB [see definition in Appendix B].)

BONDING BOTH

(The program will consider both partial and unbonded conditions for rigid overlays on rigid pavement. The least expensive will be selected for each strategy.)

INITIAL.FAILURE YES

(This specifies that flexible overlays on rigid pavement will be designed for initial failure, thereby establishing the overlay design factor.)

GENERATE.MATERIAL.COMBINATIONS YES

(In flexible pavement design, the program will generate all possible layer combinations.)

CLIMATE NORMAL

OVERLAY.RESTRICTION NONE

(Both flexible and rigid overlays will be considered.)

MINIMUM.THICKNESS.FLEXIBLE.OVERLAY 4.0

MINIMUM.THICKNESS.RIGID.OVERLAY 6.0

(These two cards specify the minimum allowable overlay thicknesses; calculated thicknesses less than the minimums will be revised to those thicknesses.)

TIMES.OF.OVERLAYS

STRATEGY 1

STRATEGY 2 10 20

STRATEGY 3 14 20

(The above data indicate that three overlay strategies are being considered; no overlay in the design life, overlays at 10 and 20 years; and overlays at 14 and 20 years.)

FLEXIBLE.PAVEMENT.MATERIAL.PROPERTIES

SUBGRADE 1 5 96 12 COHESIVE FS

(This card specifies that the subgrade material has a CBR of 5 and a density of 96 percent of maximum for a depth of 12 in. [305 mm], and that it is cohesive and frost-susceptible.)

COMPACTED 1 15 100 COHESIONLESS NFS

(This card specifies that the compacted subgrade [select material layer] has a CBR of 15, in-place density of 100 percent, and that it is cohesionless and nonfrost-susceptible.)

SUBBASE 1 50 100 COHESIONLESS NFS

SUBBASE 2 30 100 COHESIONLESS NFS

SUBBASE 3 22 100 COHESIVE FS

(The SUBBASE cards provide the CBR, in-place density, cohesion, and frost-susceptibility data for three available materials.)

BASE 1 100

(The base material has a CBR of 100.)

SUBGRADE.MODULUS 75

SUBGRADE.CBR 5

SUBGRADE.DENSITY 90

SUBGRADE.COHESSION.INDEX COHESIVE FS

(This set of subgrade cards provides the characteristics of the naturally occurring roadbed material.)

CONCRETE.FLEXURAL.STRENGTH 600

DISCOUNT 0.10

(Rate used to discount costs to present worth.)

ESCALATION.RATE 0.05

(Rate used to account for the effect of inflation.)

GEOGRAPHIC.FACTOR 0.95

(This indicates that the unit costs used in the problem are 5 percent higher than the anticipated costs at the project site.)

COMPACTED.SUBGRADE 1 1 .10 30 1.15

FLEXIBLE.PAVEMENT.BASE 1 1 .35 50 17.50

SUBBASE 1 1 .60 40 8.00

SUBBASE 2 1 .50 40 6.00

SUBBASE 3 1 .35 40 5.10

FLEXIBLE.PAVEMENT 1 .75 40 30

RIGID.PAVEMENT.BASE 1 .50 40 8.00

RIGID.PAVEMENT 1 1 30 35

RIGID.OVERLAY.PARTIAL.BOND 1 1.1 30 33

RIGID.OVERLAY.UNBONDED 1 1.2 30 34

FLEXIBLE.OVERLAY 1 .65 20 13.

(The above 11 cards present cost data for each material which will be considered in this problem.)

DELAY.COST.RIGID.OVERLAY 35000

DELAY.COST.FLEXIBLE.OVERLAY 15000

(These two variables provide the estimated cost incurred by users of the facility during cessation of operations for constructing an overlay.)

VEHICLE.MAINTENANCE 1 1000 15 10000 25 50000

(This is an estimate of the cost function which defines user costs incurred from rough or failing pavements.)

ROUTINE.MAINTENANCE RIC 1 .01 10 .10 25 .35

ROUTINE.MAINTENANCE ROS 1 .01 10 .17 25 .33

ROUTINE.MAINTENANCE FIC 1 .01 10 .08 25 .40

ROUTINE.MAINTENANCE FOS 1 .01 10 .20 25 .40

(The above four variables define the estimated cost functions for total maintenance and repair activities for four conditions:

RIC—rigid initial construction

ORS—rigid overlay system

FIC—flexible initial construction

FOS—flexible overlay system.)

VEHICLE.TYPE HEAVY-LOAD

YEARLY.TRAFFIC 500 500 500 500 500 500 500 500 500 500 500 500 500 500 500
500 500 500 500 500 500 500 500 500

CONCRETE.STRESSES.ON.GRADE 881.7 730.6 623.3 533.3 462.8 403.5 354.7 318.7 287.7 261.4

CONCRETE.STRESSES.OVER.ASPHALT 722.8 598.7 503.1 431.8 379.8 336.6 301.0 271.1 244.5
220.2

(The above two cards list concrete stresses on-grade and over asphalt for 10 pavement thicknesses. These data are required for each VEHICLE.TYPE when the READ option of RIGID.STRUCTURAL.ANALYSIS is selected.)

VEHICLE.TYPE C-5A

YEARLY.TRAFFIC 500 500 500 500 500 500 500 500 500 500 500 500 500 500 500
500 500 500 500 500 500 500 500 500

CONCRETE.STRESSES.ON.GRADE 428.4 361.6 312.1 273.5 240.4 212.4 189.5 170.9 155.5 142.6

CONCRETE.STRESSES.OVER.ASPHALT 332.9 281.6 241.6 211.7 188.0 169.4 153.4 139.3 126.8
116.0

TL 5540.0 250.0 870.0 4920.0

PGLENDS 5500.0 250.0 550.0 1000.0 4660.0 560.0

TD 0.0 -100.0 547.3 0.0 -60.0 547.5

TD 0.0 0.0 547.5 0.0 40.5 547.9

TD 0.0 95.0 548.2
TD 500.0 -100.0 547.1 500.0 -50.0 547.1
TD 500.0 0.0 547.5 500.0 60.0 547.9
TD 500.0 100.0 548.1
TD 1000.0 -99.0 547.3 1000.0 -50.0 547.5
TD 1000.0 0.0 547.6 1000.0 70.0 547.9
TD 1000.0 100.0 548.3
TD 1500.0 -100.0 547.5 1500.0 -50.0 547.8
TD 1500.0 0.0 547.9 1500.0 50.0 548.2
TD 1500.0 100.0 548.4
TD 2000.0 -99.0 547.4 2000.0 -50.0 547.5
TD 2000.0 0.0 547.9 2000.0 100.0 547.9
TD 3000.0 -101.0 547.5 3000.0 -45.0 547.9
TD 3000.0 0.0 548.1 3000.0 52.0 548.3
TD 3000.0 97.0 548.5
TD 4000.0 -97.0 547.9 4000.0 -55.0 548.3
TD 4000.0 0.0 548.5 4000.0 50.0 548.7
TD 4000.0 105.0 549.0
TD 5000.0 -100.0 548.4 5000.0 -50.0 548.8
TD 5000.0 0.0 549.3 5000.0 50.0 549.7
TD 5000.0 100.0 550.1
TDR 6000.0 -100.0 559.3 4.2
TDR 6000.0 -55.0 559.3 3.9
TDR 6000.0 0.0 559.3 3.5
TDR 6000.0 47.0 559.3 3.3
TDR 6000.0 105.0 559.3 3.1
TDR 6600.0 -100.0 562.8 4.8

TDR 6600.0 -51.0 562.8 4.5

TDR 6600.0 0.0 562.8 4.3

TDR 6600 49.0 562.8 4.0

TDR 6600.0 103.0 562.8 3.7

PGLBRK 5000.0 556.0

TMP -45.0 0.0 45.0 0.0

ELIM 2.0 2.0

COST 1.15 1.40

RUN 75.0 EP 0.0 6300.0

(The preceding cards from TL to RUN contain the fixed-format earthwork data. Appendix B describes these data.)

WANDER UNCHANNELIZED

TRAFFIC.AREA A

(The runway section being considered is classified as traffic area A, based on the loads it will carry.*)

LOAD.CATEGORY MEDIUM

(Based on the traffic projections, the load category is medium.** This variable establishes minimum thickness requirements for the pavement.)

DRNAGE 60 .011 45 22E-04 4.00 6300 3.35 2.50 2.20 .0020 0.130 1 35

(This card provides the fixed-format data for the drainage analysis. Appendix B explains these data.)

END OF DATA

Results

Figures E1 through E9 are extracts of the LIFE2 output for the example problem using the preceding data.

Figure E1 presents the pavement thickness vs. service life array. The years during the design life used in this array are taken from the input variable TIMES. In flexible pavement design, the pavement thicknesses given are those required to provide structural adequacy above the material with a corresponding CBR. For example, subbase material 3 in the input has a CBR of 22; for the cumulative traffic to the 25th year, this material requires 19.5 in. (495 mm) of material above this subbase layer based on its structural properties.[†] In rigid pavement design, the required slab thickness is provided at each service life for the subgrade material with a modulus of reaction of 75 pci (2076 g/cm³) for this example.** The program uses this array to determine required thicknesses of the materials for designing pavements which will be functional to the various TIMES.OF.OVERLAYS. It should be stressed that these are structural requirements and that the actual design thickness for each material may be controlled by density or frost protection requirements.

*See TM 5-824-1 for a complete definition of traffic areas and load categories.

**See TM 5-824-2 for the Corps of Engineers' flexible pavement design method for airfields.

[†]See TM 5-824-3 for the Corps of Engineers' rigid pavement design method for airfields.

Figure E2 summarizes the life-cycle costs for each combination of design scheme and maintenance strategy. The costs of construction and maintenance during the facility's life are combined to give the total life-cycle cost (adjusted to present worth). The results are separated into rigid designs and flexible designs and ranked according to their life-cycle cost. In this example, six overlay strategies are considered—three with rigid initial construction and three with flexible initial construction (based on the variable TIMES.OF.OVERLAYS). Only the optimal scheme (i.e., pavement design) is provided for each rigid pavement strategy. In the flexible pavement results, seven schemes are given for each strategy. These represent all possible layer combinations for the materials available.

Figures E3 and E4 show the suboptimized solutions for overlay strategies 5 and 6. These strategies provide for an overlay in the 14th and the 20th years. Strategy 5 is used for rigid initial construction, and strategy 6 is used for flexible initial construction. The optimal overlay type and thickness are given for each solution. This type of output is presented for each strategy evaluated by the program.

Figures E5 and E6 provide the design schemes associated with the overlay strategies presented in Figures E3 and E4. Figure E5 is the construction cost analysis for the optimal rigid pavement design associated with strategy 5. A base tradeoff was performed resulting in a reduction of the slab thickness by employing 6 in. (152 mm) of base. Figure E6 presents the seven flexible design schemes associated with strategy 6. Note that there is a variation in earthwork costs because of differences in total thickness and that drainage is required for three of the schemes. This type of output is provided for each design scheme analyzed by the program.

The volume of cut and fill and total earthwork cost is provided in the output for each design scheme. Figure E7 illustrates this output. Figure E8 is the earthwork mass diagram plotted by the program as a user option.

Figure E9 summarizes the drainage analysis performed by the program. If drainage is required, its construction cost becomes a line item in the design scheme analysis (see Figure E6) and is included in the total cost of construction for that scheme.

4
 REQUIRED THICKNESS OF PROTECTION VERSUS SERVICE LIFE RELATIONSHIP FOR FLEXIBLE PAVEMENT MATERIALS WITH CRR-S USED IN THIS RUN
 DENSITY AND/OR FROST REQUIREMENTS MAY CONTROL THICKNESS REQUIREMENTS

	SERVICE LIFE					
CRR	1.	5.	10.	15.	20.	25.
5.	40.0	47.1	50.2	51.8	52.9	53.8
15.	19.0	22.4	23.8	24.6	25.1	25.6
22.	14.7	17.1	18.1	18.7	19.1	19.5
30.	11.9	13.4	14.8	15.2	15.5	15.8
50.	7.7	9.1	9.7	10.1	10.3	10.4
100.	4.1	4.7	5.0	5.1	5.2	5.3

78

TOTAL FLEXIBLE PAVEMENT THICKNESS VERSUS SERVICE LIFE RELATIONSHIP FOR THE SUBGRADE CRR USED IN THIS RUN

	SERVICE LIFE					
CRR	1.	5.	10.	15.	20.	25.
5.	40.0	47.1	50.2	51.8	52.9	53.8

RIGID PAVEMENT THICKNESS (PCCI) VERSUS SERVICE LIFE RELATIONSHIP FOR THE SUBGRADE MODULUS (K) USED IN THIS RUN

	SERVICE LIFE					
SUBGRADE MODULUS	1.	5.	10.	15.	20.	25.
75.	24.4	25.8	26.5	27.0	27.4	27.7

Figure E1. Pavement thickness vs. service life array.

SUMMARY OF RIGID CONSTRUCTION SCHEMES AND CORRESPONDING OVERLAY STRATEGIES
IN ASCENDING ORDER OF TOTAL ADJUSTED COSTS

SCHEME NO	STRATEGY NO	CONSTRUCTION COST	ADJUSTED STRATEGY COST	TOTAL	ADJUSTED COSTS
9	3	1937411.06	289197.09		2226608.04
17	5	1956162.45	278549.72		2234712.17
1	1	2005600.21	244716.04		2200316.26

SUMMARY OF FLEXIBLE CONSTRUCTION SCHEMES AND CORRESPONDING OVERLAY STRATEGIES
IN ASCENDING ORDER OF TOTAL ADJUSTED COSTS

SCHEME NO	STRATEGY NO	CONSTRUCTION COST	ADJUSTED STRATEGY COST	TOTAL	ADJUSTED COSTS
19	4	613772.66	273007.23		886779.89
20	4	614441.84	273007.23		887449.07
11	4	612716.63	284442.25		897158.88
12	4	616619.52	284442.25		899061.77
21	4	654589.54	273007.23		927596.77
23	6	670650.70	273007.23		943657.93
3	2	650019.64	285959.79		935979.43
4	2	660529.12	285959.79		946488.91
13	4	663472.83	284442.25		947915.08
15	4	669348.23	284442.25		953790.48
24	4	646130.64	273007.23		919137.87
14	4	702451.32	284442.25		986893.57
22	2	700314.04	285959.79		986273.83
5	2	702451.32	285959.79		988411.11
14	4	715797.52	284442.25		1000239.77
7	2	729661.24	285959.79		1015221.03
8	2	744281.67	285959.79		1030241.46
4	2	860233.05	273007.23		1133240.28
12	6	860233.05	284442.25		1144675.31
10	2	861063.60	285959.79		1147023.39

Figure E2. Life-cycle costs.

YR	MAINTENANCE COST	OVERLAY THICKNESS(IN)	OVERLAY COST	USER COSTS	TOTAL COST	ADJUSTED COST
1	598.50		0.00	950.00	1548.50	1481.82
2	1192.00		0.00	1560.71	2752.71	2525.32
3	1785.50		0.00	2171.43	3956.93	3476.21
4	2379.00		0.00	2782.14	5176.14	4340.51
5	2972.50		0.00	3392.86	6385.36	5123.04
6	3566.00		0.00	4003.57	7594.57	5931.84
7	4159.50		0.00	4614.29	8803.79	6469.27
8	4753.00		0.00	5225.00	10013.00	7040.99
9	5346.50		0.00	5835.71	11222.21	7551.48
10	5940.00		0.00	6446.43	12431.43	8034.04
11	6533.50		0.00	7057.14	13640.64	8451.21
12	7127.00		0.00	7667.86	14847.86	8826.94
13	7720.50		0.00	8278.57	16056.07	9737.11
14	8314.00	4 F	170610.00	8889.29	189474.29	102310.07
15	8907.50		0.00	9500.00	1548.50	800.14
16	9501.00		0.00	1560.71	3422.71	1692.43
17	10094.50		0.00	2171.43	5296.93	2506.34
18	10688.00		0.00	2782.14	7171.14	3247.10
19	11281.50		0.00	3392.86	9045.36	3919.37
20	11875.00	4 F	170610.00	4003.57	181529.57	75269.04
21	12468.50		0.00	950.00	1548.50	614.43
22	13062.00		0.00	1560.71	3422.71	1299.41
23	13655.50		0.00	2171.43	5296.93	1924.64
24	14249.00		0.00	2782.14	7171.14	2493.43
25	14842.50		0.00	3392.86	9045.36	3009.67
TOTALS	\$ 105603.50		\$ 341220.00	\$ 94592.86	\$ 540814.36	\$ 278549.72

THIS STRATEGY IS APPROPRIATE FOR USE WITH A RIGID DESIGN

F OR R REPRESENTS FLEXIBLE OR RIGID OVERLAYS

A NUMBER IN PARENTHESES FOLLOWING FLEXIBLE IS THE THICKNESS OF BASE MATERIAL IN THE OVERLAY SYSTEM FOR RIGID. P IN PARENTHESES MEANS PARTIAL HOLD AND U MEANS UNBONDED

Figure E3. Suboptimized solution for overlay strategy 5.

NO	MAINTENANCE COST	OVERLAY THICKNESS(IN)	OVERLAY COST	USER COSTS	TOTAL COST	ADJUSTED COST
1	554.50		0.00	950.00	1544.50	1481.82
2	1044.00		0.00	1560.71	2604.71	2403.53
3	1526.50		0.00	2171.43	3700.93	3243.11
4	1945.00		0.00	2782.14	4777.14	4005.93
5	2440.50		0.00	3392.86	5853.36	4497.03
6	2926.00		0.00	4003.57	6929.57	5321.19
7	3401.50		0.00	4614.29	8015.79	5882.88
8	3857.00		0.00	5225.00	9082.00	6346.33
9	4322.50		0.00	5835.71	10158.21	6435.51
10	4788.00		0.00	6446.43	11234.43	7234.16
11	5244.00		0.00	7057.14	12301.14	8085.72
12	5741.50		0.00	7667.86	13409.36	8450.53
13	6214.00		0.00	8278.57	14492.57	8574.44
14	6685.20	4 F	170610.00	8889.29	159394.49	102267.88
15	598.50		0.00	950.00	1548.50	500.14
16	1442.00		0.00	1560.71	3422.71	1692.43
17	3125.50		0.00	2171.43	5296.93	2506.38
18	4349.00		0.00	2782.14	7131.14	3247.10
19	5452.50		0.00	3392.86	9045.36	3919.37
20	6416.00	4 F	170610.00	4003.57	181529.57	75269.94
21	598.50		0.00	950.00	1548.50	614.43
22	1442.00		0.00	1560.71	3422.71	1799.61
23	3125.50		0.00	2171.43	5296.93	1924.64
24	4349.00		0.00	2782.14	7131.14	2493.43
25	5452.50		0.00	3392.86	9045.36	3009.67
TOTALS	97071.50	R	\$ 341220.00	\$ 94542.86	\$ 532834.36	\$ 273007.23

THIS STRATEGY IS APPROPRIATE FOR USE WITH SEVERAL FLEXIBLE DESIGNS

F OR R REPRESENTS FLEXIBLE OR RIGID OVERLAYS

A NUMBER IN PARENTHESES FOLLOWING FLEXIBLE IS THE THICKNESS OF BASE MATERIAL IN THE OVERLAY SYSTEM FOR FIG. 10. P IN PARENTHESES MEANS PARTIAL BOND AND U MEANS UNBONDED

Figure E4. Suboptimized solution for overlay strategy 6.

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	RIGID PAVEMENT	26.0	28.79	1814074.14
2	RIGID PAVEMENT BASE	4.0	1.39	87473.08
TOTAL THIS SECTION		32.0	40.47	\$ 1901547.21
TOTALS FOR ALL SECTIONS		AREA = 43000 SY	COSTS = \$ 1901547.21	
EARTHWORK COSTS			\$	54615.24
DRAINAGE COSTS			\$	0.00
TOTAL ALL CONSTRUCTION			\$	1956162.45

Figure E5. Rigid construction cost analysis for scheme 17 associated with overlay strategy 5.

Scheme 18

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	2.0	4.31	523647.50
3	THIRD SURFACE	6.0	.91	57344.62
4	FIRST COMPACTED SURGRADE	6.0	.27	16419.91
TOTAL THIS SECTION				\$ 222339.53

TOTALS FOR ALL SECTIONS
 AREA = 43000 SY
 FARTWORK COSTS
 DRAINAGE COSTS
 TOTAL ALL CONSTRUCTION
 COSTS = \$ 222339.53
 \$ 37493.52
 \$ 0.00
 \$ 26033.05

Scheme 19

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	7.0	2.33	146632.50
3	SECOND SURFACE	6.0	1.14	72126.92
4	FIRST COMPACTED SURGRADE	22.0	.82	51491.64
TOTAL THIS SECTION				\$ 494688.56

TOTALS FOR ALL SECTIONS
 AREA = 43000 SY
 FARTWORK COSTS
 DRAINAGE COSTS
 TOTAL ALL CONSTRUCTION
 COSTS = \$ 494688.56
 \$ 40584.51
 \$ 74099.39
 \$ 613372.46

Figure E6. Flexible construction cost analysis for schemes associated with overlay strategy 6.

Scheme 20

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	5.0	2.00	125685.00
3	FIRST SURFACE	6.0	1.47	92490.77
4	FIRST COMPACTED SURGRADE	23.0	.85	53658.62
TOTAL THIS SECTION				\$ 496471.89
TOTALS FOR ALL SECTIONS				
			AREA =	43000 SY
PAVEMENT COSTS				
				COSTS = \$ 496471.89
DRAINAGE COSTS				
				\$ 40544.51
TOTAL ALL CONSTRUCTION				
				\$ 70225.50
				\$ 615861.89

Scheme 21

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	7.0	2.33	146632.50
3	SECOND SURFACE	18.0	2.75	173411.54
4	THIRD SURFACE	6.0	.91	57394.62
5	FIRST COMPACTED SURGRADE	6.0	.27	16819.91
TOTAL THIS SECTION				\$ 618696.07
TOTALS FOR ALL SECTIONS				
			AREA =	43000 SY
PAVEMENT COSTS				
				COSTS = \$ 618696.07
DRAINAGE COSTS				
				\$ 37893.52
TOTAL ALL CONSTRUCTION				
				\$ 0.00
				\$ 656589.59

Figure E6 (cont'd).

Scheme 22

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	6.0	2.00	125685.00
3	FIRST SURBASE	19.0	3.81	240720.77
4	THIRD SURBASE	6.0	.91	57394.62
5	FIRST COMPACTED SURGRADE	6.0	.27	16819.91
TOTAL THIS SECTION				\$ 664657.80

COSTS = \$ 664657.80

TOTALS FOR ALL SECTIONS AREA = 43000 SY

FARTHWORK COSTS

DRAINAGE COSTS

TOTAL ALL CONSTRUCTION

\$ 37893.52

\$ 0.00

\$ 702551.32

Scheme 23

LAYER NO	DESCRIPTION	THICKNESS(IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	6.0	2.00	125685.00
3	FIRST SURBASE	6.0	1.47	92490.77
4	SECOND SURBASE	6.0	1.14	72126.92
5	FIRST COMPACTED SURGRADE	17.0	.65	40656.72
TOTAL THIS SECTION				\$ 555596.92

COSTS = \$ 555596.92

TOTALS FOR ALL SECTIONS AREA = 43000 SY

FARTHWORK COSTS

DRAINAGE COSTS

TOTAL ALL CONSTRUCTION

\$ 40584.51

\$ 74468.87

\$ 670650.30

Figure E6 (cont'd).

Scheme 24

LAYER NO	DESCRIPTION	THICKNESS (IN)	COST/SY	TOTAL COST
1	FLEXIBLE PAVEMENT	5.0	3.56	224437.50
2	1ST FLEXIBLE PAVEMENT BASE	6.0	2.00	125445.00
3	FIRST SURPHASE	6.0	1.47	92690.77
4	SECOND SURPHASE	13.0	2.04	131209.62
5	THIRD SURPHASE	6.0	.91	57394.62
6	FIRST COMPACTED SURGRADE	6.0	.27	16414.91
TOTAL THIS SECTION		42.0	10.29	\$ 648237.41
TOTALS FOR ALL SECTIONS				
EARTHWORK COSTS		AREA = 63000 SY		COSTS = \$ 648237.41
DRAINAGE COSTS				\$ 37893.52
TOTAL ALL CONSTRUCTION				\$ 0.00
				\$ 686130.94

Figure E6 (cont'd).

DESIGN SCHEME 17	THICKNESS OF 32.00 INCHES	386. CURIC YARDS
THE ESTIMATED COST PER CUBIC YARD OF CUT IS \$ 1.150	THE NET VOLUME OF CUT IS	386. CURIC YARDS
THE ESTIMATED COST OF CUT IS \$	443.50	
THE ESTIMATED COST PER CUBIC YARD OF FILL IS \$ 1.400	THE NET VOLUME OF FILL IS	38694. CURIC YARDS
THE ESTIMATED COST OF FILL IS \$	54171.74	
THE TOTAL COST FOR APPROACH ZONES IS \$	0.00	
THE TOTAL COST OF EARTHWORK IS ESTIMATED AT \$	54615.24	

Figure E7. Output for design scheme 17.

MASS DIAGRAM

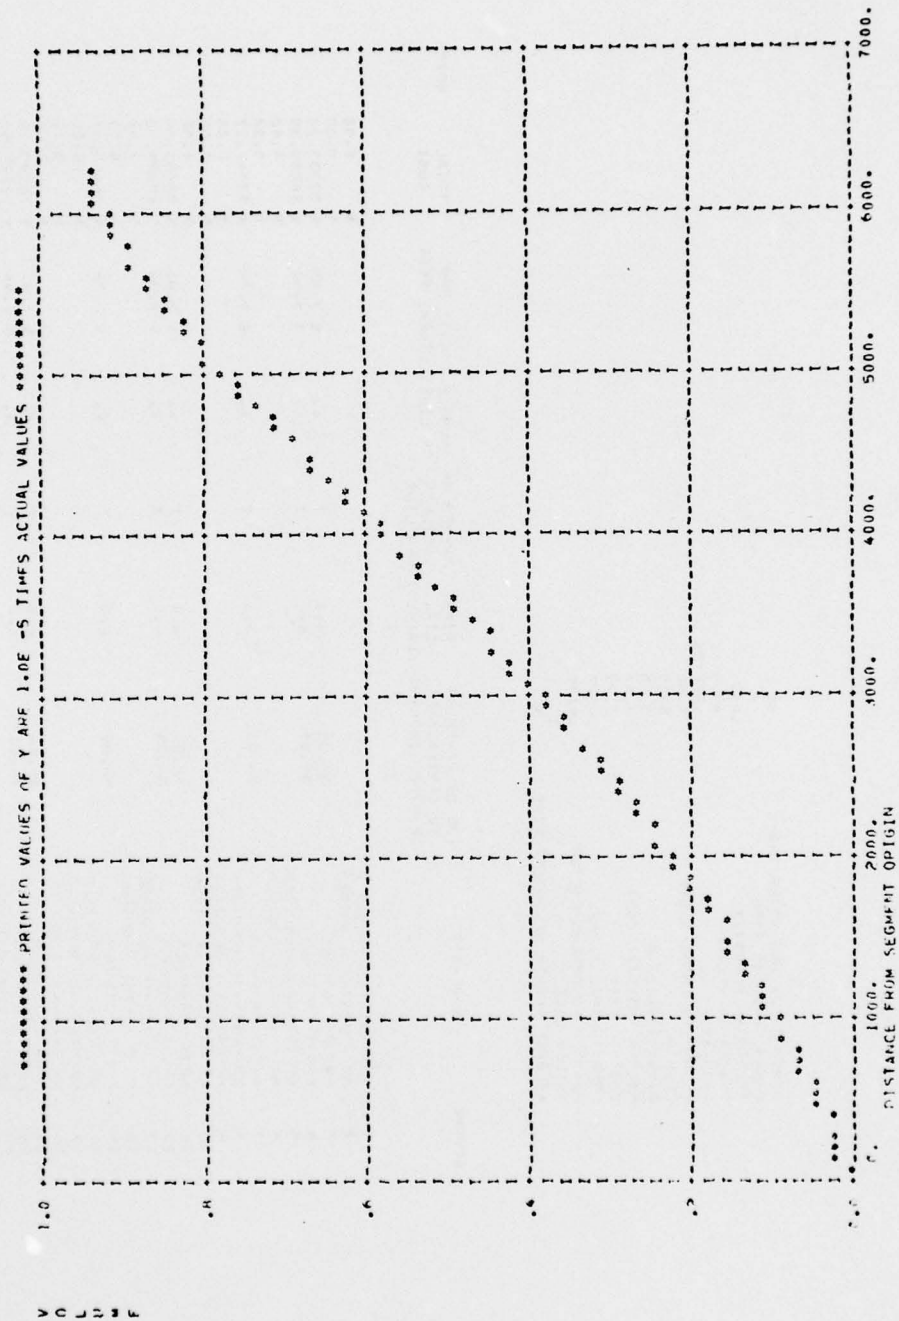


Figure E8. Earthwork mass diagram.

DEPTH TO GROUND WATER TABLE									
USERS OPEN TO PIPE									
EFFECTIVE POROSITY									
DRAINAGE LENGTH									
PERMEABILITY									
HEIGHT OF CROSS SLOPE									
LENGTH									
EXCAVATION COST									
FILTER MATERIAL COST									
COST OF PIPE									
LONGITUDINAL SLOPE									
MANHOLE ROUGHNESS FACTOR									
OUTLET CODE									
AVERAGE LENGTH OF OUTLET PIPE									
SCHEME									
ANALYSIS									
TOP OF PAVEMENT TO CENTERLINE OF PIPE (INCHES)									
PIPE DIA. (INCHES)									
NUMBER OF OUTLETS PER LINE									
NUMBER OF LINES									
COST PER LINEAL FOOT									
TOTAL COST									
NOTES									
1	NO DRAINAGE REQUIRED								\$ 0.00
2	NO DRAINAGE REQUIRED								\$ 0.00
3	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.89			\$ 77373.29
4	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.91			\$ 78099.39
5	NO DRAINAGE REQUIRED								\$ 0.00
6	NO DRAINAGE REQUIRED								\$ 0.00
7	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.75			\$ 73742.77
8	NO DRAINAGE REQUIRED								\$ 0.00
9	NO DRAINAGE REQUIRED								\$ 0.00
10	NO DRAINAGE REQUIRED								\$ 0.00
11	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.91			\$ 78099.39
12	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.94			\$ 78825.50
13	NO DRAINAGE REQUIRED								\$ 0.00
14	NO DRAINAGE REQUIRED								\$ 0.00
15	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.78			\$ 74468.87
16	NO DRAINAGE REQUIRED								\$ 0.00
17	NO DRAINAGE REQUIRED								\$ 0.00
18	NO DRAINAGE REQUIRED								\$ 0.00
19	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.91			\$ 78099.39
20	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.94			\$ 78825.50
21	NO DRAINAGE REQUIRED								\$ 0.00
22	NO DRAINAGE REQUIRED								\$ 0.00
23	FROST CONTROLS	36.00	6.0	7	4.	\$ 2.78			\$ 74468.87
24	NO DRAINAGE REQUIRED								\$ 0.00

Figure E9. Drainage analysis summary.

CITED REFERENCES

- Armed Services Procurement Regulation 3-801 (Department of Defense, 1 July 1976).
- Kreger, W. C., *Computerized Aircraft Ground Flotation Analysis—Edge-Loaded Rigid Pavement*, Report ERR-FW-572 (General Dynamics Corp., 1967).
- Lindow, E., et al., *LIFE2 User's Manual*, Technical Report C-59/AD023786 (Construction Engineering Research Laboratory [CERL], January 1976).
- Maintenance Cost Predictions for Airfield Pavements*, Unpublished Report (CERL, 1974).
- Marvin, E. and P. McManus, *Life Cycle Analysis on an Airfield Pavement Facility*, Unpublished Report (CERL, 1972).
- Rigid Pavements for Airfields Other Than Army*, TM 5-824-3 (Department of the Army, 7 December 1970).
- "SCAN" *User's Manual* (University of Illinois, 1970).
- Willmer, J., et al., *User Manual for LIFE1 Computer Program*, Technical Report S-28/AD774849 (CERL, January 1974).

UNCITED REFERENCES

- Airfield Flexible Pavements Air Force*, TM 5-824-2 (Department of the Army, 7 February 1969).
- Airfields Other Than Army—General Provisions for Airfield Design*, TM 5-824-1 (Department of the Army, 1 December 1960).
- Development of Rigid Pavement Thickness Requirements for Military Roads and Streets*, Technical Report No. 4-18 (Ohio River Division Laboratories, July 1961).
- Engineering Economic Studies—Life-Cycle Costing Instructions* (Department of the Army, 1971).
- General Provisions and Geometric Design for Roads, Streets, Walks, and Open Storage Areas*, TM 5-822-2 (Department of the Army, 21 July 1961).
- Marvin, E., et al., *LIFE2 Service Test, Fort Hood Demonstration Project No. 1: Tactical Equipment Shops and Facilities*, Unpublished Working Paper (CERL, September 1975).
- Rigid Pavements for Roads, Streets, Walks, and Open Storage Areas*, TM 5-822-6 (Department of the Army, 14 April 1969).
- Weiner, A. M., and E. L. Marvin, *Computerized Frost Protection Design System*, Unpublished Report (CERL, January 1974).

CERL DISTRIBUTION

FOM

US Army, Europe
ATTN: REAEN (4)

Director of Facilities Engineering
APO New York 09627

West Point, NY 10017
ATTN: Dept of Mechanics
ATTN: Library

HQDA (SGRD-EDE)

Chief of Engineers
ATTN: Tech Monitor
ATTN: DAEN-ASI-L (2)
ATTN: DAEN-FEE
ATTN: DAEN-FEE-A
ATTN: DAEN-FEP
ATTN: DAEN-FESA
ATTN: DAEN-FEZ-A
ATTN: DAEN-RDL
ATTN: DAEN-ZCP
ATTN: DAEN-PMS (11)

for forwarding to
National Defense Headquarters
Director General of Construction
Ottawa, Ontario K1A0K2
Canada

Canadian Forces Liaison Officer (4)
US Army Mobility Equipment
Research and Development Command
Ft Belvoir, VA 22060

British Liaison Officer (5)
US Army Mobility Equipment
Research and Development Center
Ft Belvoir, VA 22060

Airports and Const. Services Dir.
Technical Information Reference
Centre
KADL, Transport Canada Building
Place de Ville
Ottawa, Ontario Canada K1A0N8

Ft Belvoir, VA 22060
ATTN: Learning Resources Center
ATTN: ATSE-TD-TL (2)
ATTN: Kingman Building, Library

US Army Foreign Science & Tech Center
ATTN: Charlottesville, VA 22901
ATTN: Far East Office

Ft Monroe, VA 23651
ATTN: ATEN
ATTN: ATEN-FE-ME

Ft Lee, VA 23801
ATTN: DRXMC-D (2)

Ft McPherson, GA 30330
ATTN: AFEN-FEB

USA-WES
ATTN: Concrete Laboratory
ATTN: Soils and Pavements Laboratory
ATTN: Library

USA-CRREL

6th US Army
ATTN: AFKC-LG-E

I Corps (ROK/US) Group
APO San Francisco 96358

US Army Engineer District
Saudi Arabia
ATTN: Library

New York
ATTN: Chief, Design Br

Buffalo
ATTN: Library
Pittsburgh
ATTN: Library

Norfolk
ATTN: Library
ATTN: Chief, NAOEN-M

Huntington
ATTN: Library
Wilmington
ATTN: Chief, SAWEN-D

Savannah
ATTN: Library
ATTN: Chief, SASAS-L

Mobile
ATTN: Library
ATTN: Chief, SAMEN

Vicksburg
ATTN: Chief, Engr Div

Louisville
ATTN: Chief, Engr Div

Detroit
ATTN: Library
St. Paul
ATTN: Chief, ED-D

Rock Island
ATTN: Library
ATTN: Chief, Engr Div

St. Louis
ATTN: Chief, ED-D

Kansas City
ATTN: Library (2)
ATTN: Chief, Engr Div

Omaha
ATTN: Chief, Engr Div

New Orleans
ATTN: Library

Fort Worth
ATTN: Library
ATTN: Chief, SWFED-D
ATTN: Chief, SWFED-F

Albuquerque
ATTN: Library

San Francisco
ATTN: Chief, Engr Div

Sacramento
ATTN: Library, Room 8307
ATTN: Chief, SPKED-D

Far East
ATTN: Chief, Engr Div

Japan
ATTN: Library

Alaska
ATTN: Library
ATTN: Chief, NPADE-R

US Army Engineer Division
Europe
ATTN: Technical Library
New England
ATTN: Chief, NEDED-T
Middle East (Rear)
ATTN: MEDED-T

US Army Engineer Division
South Atlantic

ATTN: Laboratory
ATTN: Chief, SADIEN-1S
ATTN: Library

Huntsville
ATTN: Library (2)
ATTN: Chief, HNOED-M
ATTN: Chief, HNOED-SR

Lower Mississippi Valley
ATTN: Library

Ohio River
ATTN: Library
ATTN: Chief, Engr Div

North Central
ATTN: Library

Missouri River
ATTN: Library (2)

Southwestern
ATTN: Library
ATTN: Chief, SWOED-MA

Pacific Ocean
ATTN: Chief, Engr Div
ATTN: FMAS Branch

North Pacific
ATTN: Chief, Engr Div

Facilities Engineers
Carlisle Barracks, PA 17013
Ft Campbell, KY 42223
Ft Hood, TX 76544

TRADOC
Ft Dix, NJ 08640
Ft Belvoir, VA 22060

Ft Monroe, VA 23651
Ft Lee, VA 23801
Ft Knox, KY 40121

Ft Chaffee, AR 72905
Ft Sill, OK 73503
Ft Bliss, TX 79916

FORSKOM
Ft George G. Meade, MD 20755
Ft McPherson, GA 30330

Ft Sam Houston, TX 78234
Ft Carson, CO 80913
Ft Lewis, WA 98433

USAIC (2)
Ft Benning, GA 31905

CAC&FL (2)
Ft Leavenworth, KS 66027

AMC
Dugway, UT 84022

USACC
Ft Huachuca, AZ 85613
HQ, 1st Inf Div & Ft Riley, KS 66442
HQ, 5th Inf Div & Ft Polk, LA 71459
HQ, 7th Inf Div & Ft Ord, CA 93941

AF Civil Engr Center/XRL
Tyndall AFB, FL 32401

Little Rock AFB
ATTN: 314/DEEE (Mr. Gillham)
Jacksonville, AR 72076

Port Hueneme, CA 93043
ATTN: Library (Code LORA)
ATTN: Morrell Library

Washington, DC
ATTN: Building Research Advisory Board
ATTN: Library of Congress (2)
ATTN: Dept of Transportation Library

Defense Documentation Center (12)

Engineering Societies Library
New York, NY 10017

Lindow, Edward S

Systems approach to life cycle design of pavements.
- Champaign, IL ; Construction Engineering Research
Laboratory ; Springfield, VA ; available from National
Technical Information Service , 1978.

3v. ; 27 cm (Technical report - Construction Engineering Research Laboratory ; M-253)

Contents. v. 1, LIFE2 user's manual. v.2, LIFE2
system documentation. v.3, LIFE2 program listing.

1. Pavements-design and construction. 2. Pavements. I. Title. II. Series. U. S. Construction Engineering Research Laboratory. Technical report ; M-253.